



Operation Manual

PRODUCT NAME

Electric Actuator / Slider Type

MODEL / Series

LEF Series



<Controller>
LEC Series

This manual describes the actuators operation in combination with the LEC*6 series controllers. Refer to the manual relevant to the controller being used for full operating instructions.

SMC Corporation

| | |
|---|-----------|
| Safety Instructions | 2 |
| 1. Procedure before operation/simple setting to use straight away4 | |
| 1.1 Preparation | 4 |
| 1.2 Controller setting software | 5 |
| 1.3 Teaching box..... | 7 |
| 2. Specification | 9 |
| 2.1 Slider type LEF Series / Ball screw drive Specification..... | 9 |
| 2.2 Slider type LEF Series / Belt drive Specification..... | 12 |
| 2.3 How to Order | 14 |
| 2.4 Construction | 15 |
| 3. Product Outline | 17 |
| 3.1 System construction | 17 |
| 3.2 Setting Function..... | 18 |
| 3.3 Step data setting method | 21 |
| 3.4 Parameter setting method..... | 27 |
| 4. Wiring of cables / Common precautions | 30 |
| 5. Electric actuators / Common precautions | 31 |
| 5.1 Design and selection | 31 |
| 5.2 Mounting..... | 32 |
| 5.3 Handling | 32 |
| 5.4 Operating environment | 33 |
| 5.5 Maintenance | 34 |
| 5.6 Precautions for actuator with lock | 34 |
| 6. Electric actuators / Slider type Common precautions | 35 |
| 6.1 Design and selection | 35 |
| 6.2 Handling | 35 |
| 6.3 Mounting..... | 36 |
| 6.4 Precaution on maintenance | 36 |
| 6.5 How to detach and attach the dust seal band | 38 |
| 7. Troubleshooting | 39 |



LEF Series / Slider type Safety Instructions

These safety instructions are intended to prevent hazardous situations and /or equipment damage. These instructions indicate the level of potential hazard with the labels of "Caution," "Warning" or "Danger." They are all important notes for safety and must be followed in addition to International Standards (ISO /IEC), Japan Industrial Standards (JIS)*1) and other safety regulations*2).

*1) ISO 4414: Pneumatic fluid power -- General rules relating to systems

ISO 4413: Hydraulic fluid power -- General rules relating to systems

IEC 60204-1: Safety of machinery -- Electrical equipment of machines (Part 1: General requirements)

ISO 10218-1992: Manipulating industrial robots -- Safety

JIS B 8370: General rules for pneumatic equipment.

JIS B 8361: General rules for hydraulic equipment.

JIS B 9960-1: Safety of machinery -- Electrical equipment for machines. (Part 1: General requirements)

JIS B 8433-1993: Manipulating industrial robots - Safety. etc.

*2) Labor Safety and Sanitation Law, etc.



Caution

Caution indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.



Warning

Warning indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.



Danger

Danger indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.

Warning

1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results.

The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product.

This person should also continuously review all specifications of the product referring to its latest catalog information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly.

The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

3. Do not service or attempt to remove product and machinery /equipment until safety is confirmed.

The inspection and maintenance of machinery /equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.

When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.

Before machinery /equipment is restarted, take measures to prevent unexpected operation and malfunction.

4. Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.

1) Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.

2) Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalog.

3) An application which could have negative effects on people, property, or animals requiring special safety analysis.

4) Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.



LEF Series / Slider type Safety Instructions

Caution

The product is provided for use in manufacturing industries.

The product herein described is basically provided for peaceful use in manufacturing industries. If considering using the product in other industries, consult SMC beforehand and exchange specifications or a contract if necessary.
If anything is unclear, contact your nearest sales branch.

Limited warranty and Disclaimer /Compliance Requirements

The product used is subject to the following “Limited warranty and Disclaimer” and “Compliance Requirements”.

Read and accept them before using the product.

Limited warranty and Disclaimer

The warranty period of the product is 1 year in service or 1.5 years after the product is delivered.*3) Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.

**For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided.
This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.**

Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalog for the particular products.

***3) Vacuum pads are excluded from this 1 year warranty.**

A vacuum pad is a consumable part, so it is warranted for a year after it is delivered.

Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

Compliance Requirements

When the product is exported, strictly follow the laws required by the Ministry of Economy, Trade and Industry (Foreign Exchange and Foreign Trade Control Law).

1. Procedure before operation/simple setting to use straight away

The controller is shipped with the parameters appropriate to the actuator.

With the simple setting “easy mode”, it can be operated and running parameters can be changed easily.

1.1 Preparation

(1) Items to be prepared

Please check on the label, and the quantity of accessories, to confirm that it is the product that was ordered.

Table 1. Components

| No. | Part name | Qty |
|-----|---|-----|
| (1) | Electric actuator / Slider type | 1 |
| (2) | Controller | 1 |
| (3) | Power supply plug | 1 |
| (4) | Actuator cable | 1 |
| (5) | I/O cable (Not use in this section) | 1 |
| (6) | Teaching box | 1 |
| (7) | Controller setting kit [The controller setting software, The communication cable, USB cable and conversion unit are included.] | 1 |

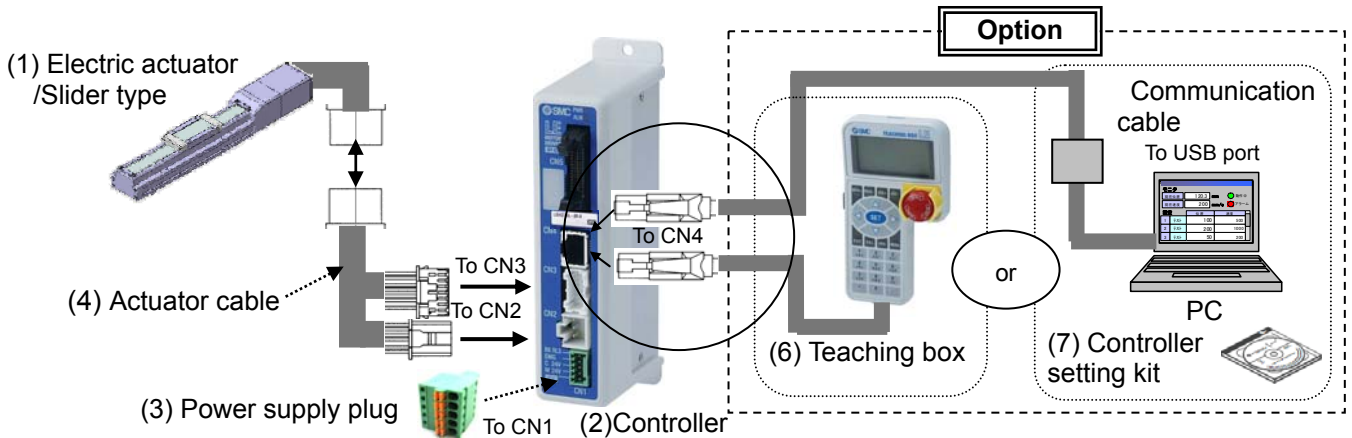


Table 2. Items to be prepared by the customer

| Part name | Conditions |
|--|---|
| Power supply 24VDC Do not use the power supply with “Inruch-restraining type” | Refer to power consumption of each actuator / See 2.1 Specification on p.9 (Prepare the power supply that has capacity of “Moment max. power consumption” or more.) |
| Wire AWG20 (0.5mm ²) | Stripped wire length 8mm |
| Power supply plug Wiring | <p>Connect the plus side of 24VDC to the C24V, M24V and EMG terminals of the power supply plug, and the minus side to the 0V terminal.</p> <p><u>Step motor (servo 24VDC)</u></p> <p>Push the open/close lever and insert the wire into the electrical wire entry</p> <p><u>Servo motor (24VDC)</u></p> |


1.2 Controller setting software

1. Installation of software

With the controller setting software CD-ROM, install the communication unit software, following the "Software Installation procedure" (PDF)


2. Startup of software

, start up the ACT Controller setting software.

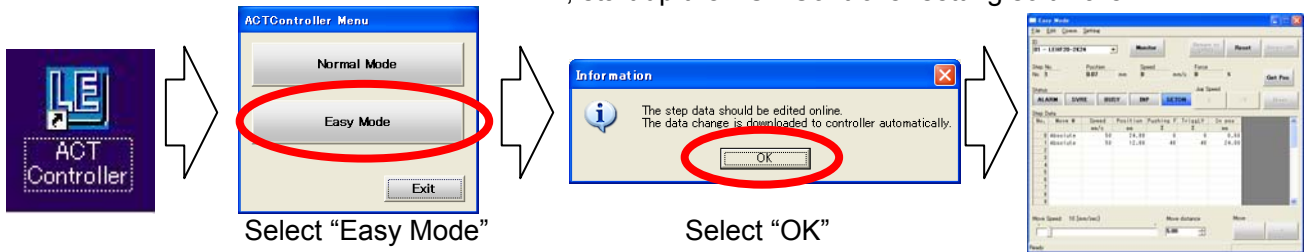


3. JOG Drive


a. Driving preparation: Servo On → Return to ORIG

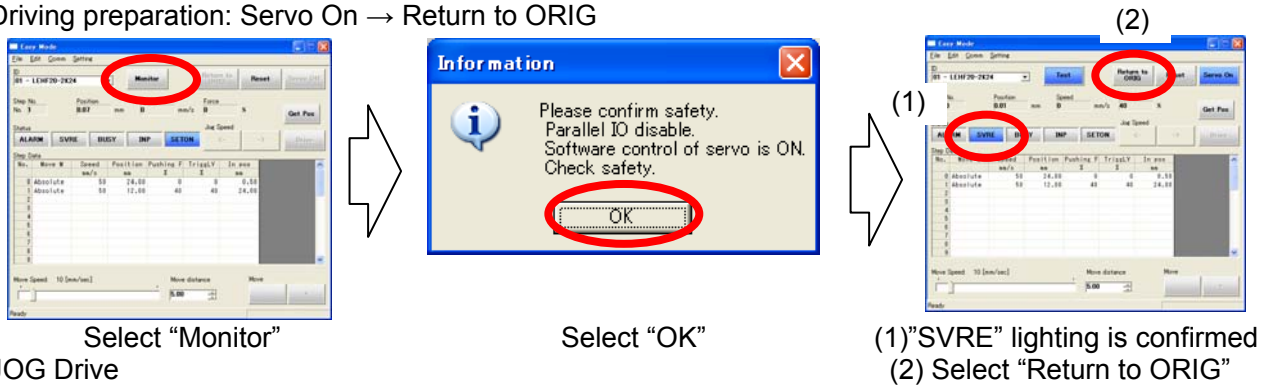

b. JOG Drive

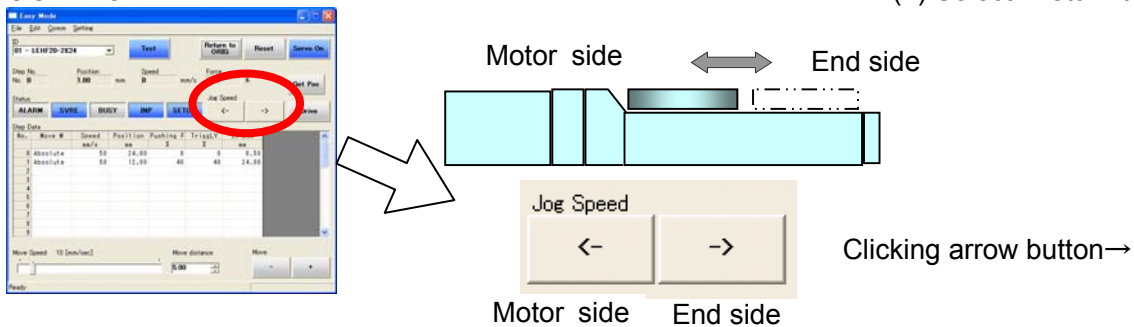

c. Driving stop: Servo Off

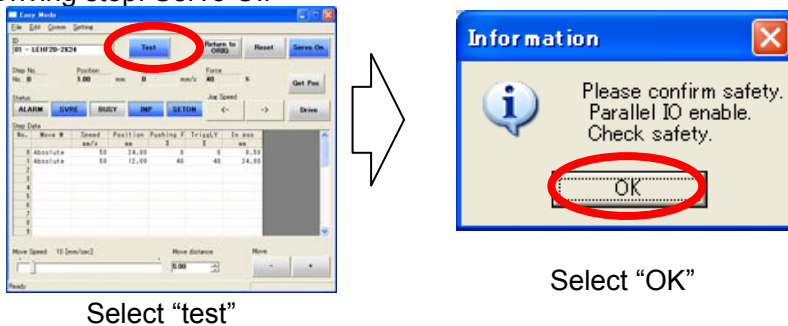


⚠ Caution

If an alarm is generated

(1) When "ALARM" is generated, release it by selecting (2) "Reset"

In the case of an alarm code that cannot be released with "Reset", turn the power supply OFF and ON again.

Note) For details of alarm codes, refer to the Controller Operation Manual.

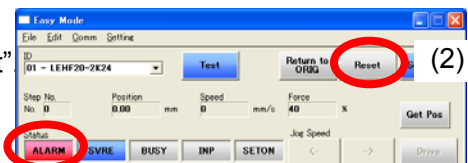


4. TEST Drive / Step No.0 → No.1 → No.0...

- a. Driving preparation: Servo On → Return to ORIG / Refer to “3.JOG Drive”.
- b. TEST Drive

“Step No.0” Operation

Procedure 1:
Select “Step No.0”
You can select anywhere in the row

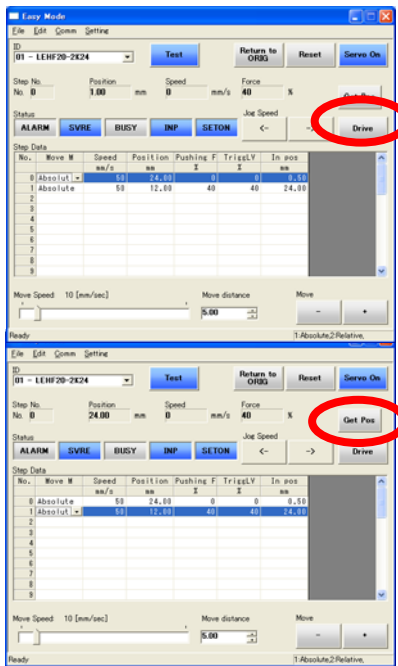

Procedure 2:
Select “Drive”

→ Operation

“Step No.1” Operation

Procedure 3:
Select “Step No.1”
You can select anywhere in the row



Procedure 4:
Select “Drive”

→ Operation


- c. Driving stop : Servo Off / Refer to “3.JOG Drive”.

5. Step data change

<“Step No.0” / Positioning operation> At the time of shipment, Step No.0 is set to positioning operation

| Step data | | | | | | |
|-----------|----------|-------|----------|-----------|---------|--------|
| No. | Move M | Speed | Position | Pushing F | TriggLV | In pos |
| | | mm/s | mm | % | % | mm |
| 0 | Absolute | 250 | 50.00 | 0 | 0 | 0.50 |

Change of positioning stop position
Position: 50mm → 30mm



Input “30”

| Step data | | | | | | |
|-----------|----------|-------|----------|-----------|---------|--------|
| No. | Move M | Speed | Position | Pushing F | TriggLV | In pos |
| | | mm/s | mm | % | % | mm |
| 0 | Absolute | 250 | 30.00 | 0 | 0 | 0.50 |


For details of operation, and relationship between operation procedure and input/output signals, refer to “3.3 Step Data setting method” p. 21 to 24.

6. Controller setting software screen explanation


Refer to the “Help / Easy mode” menu in the “ACT Controller” setting software.

1.3 Teaching box


1. Name

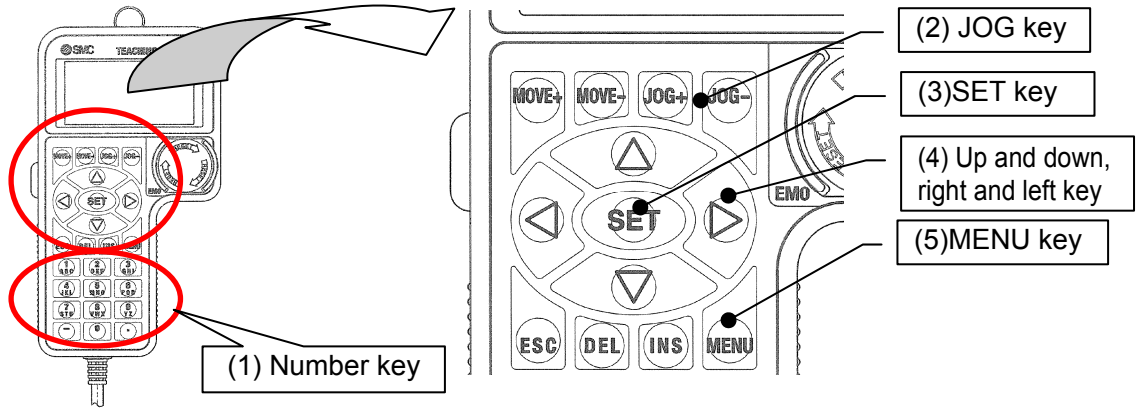


2. JOG Drive

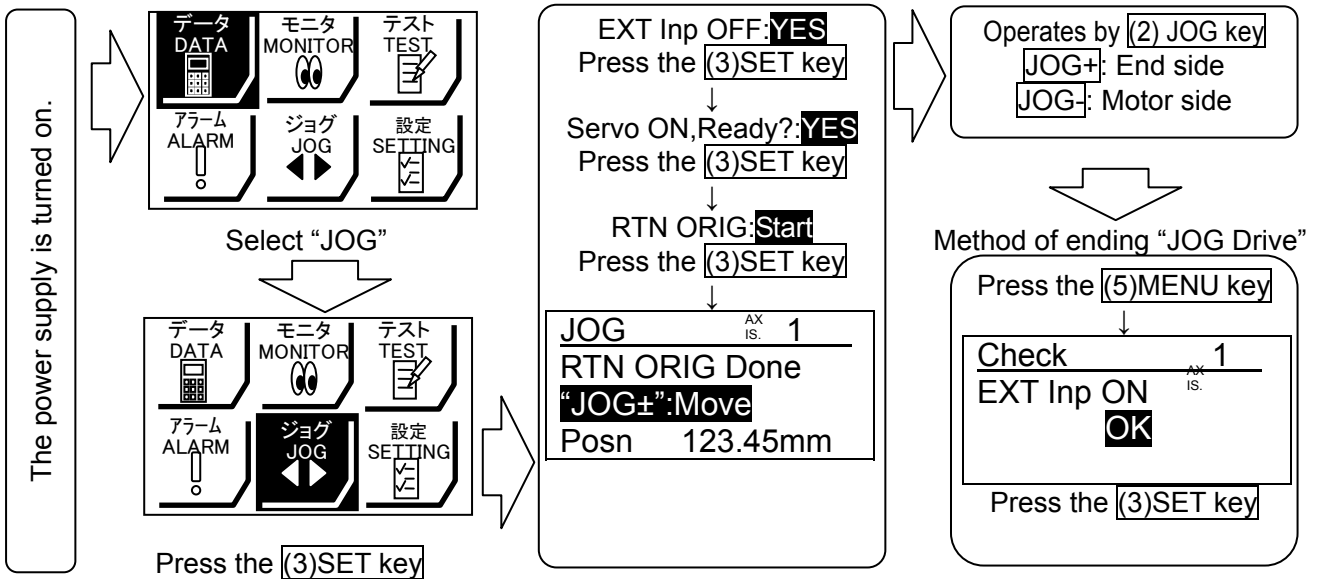

3. TEST Drive / Step No.0 → No.1 → No.0...

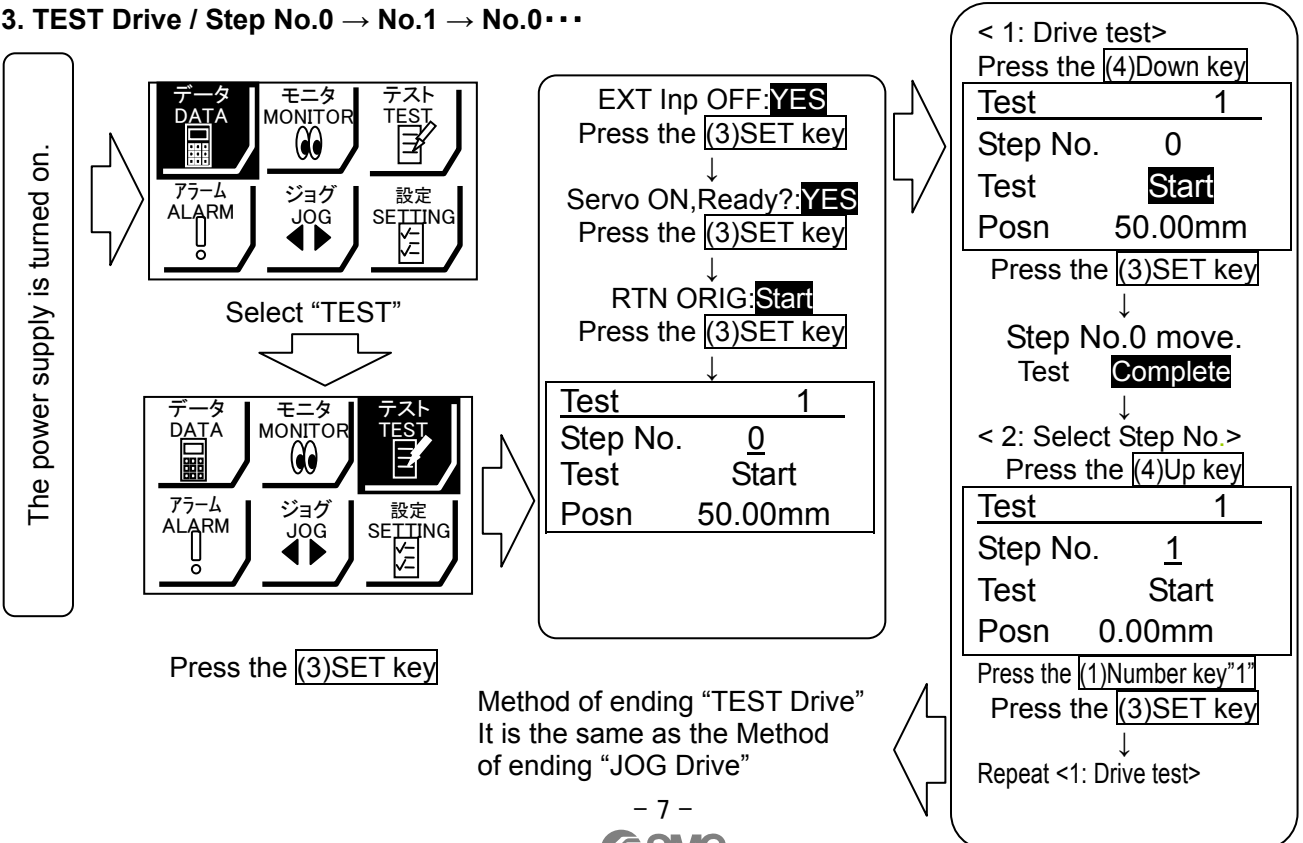

4. Step data change with positioning operation

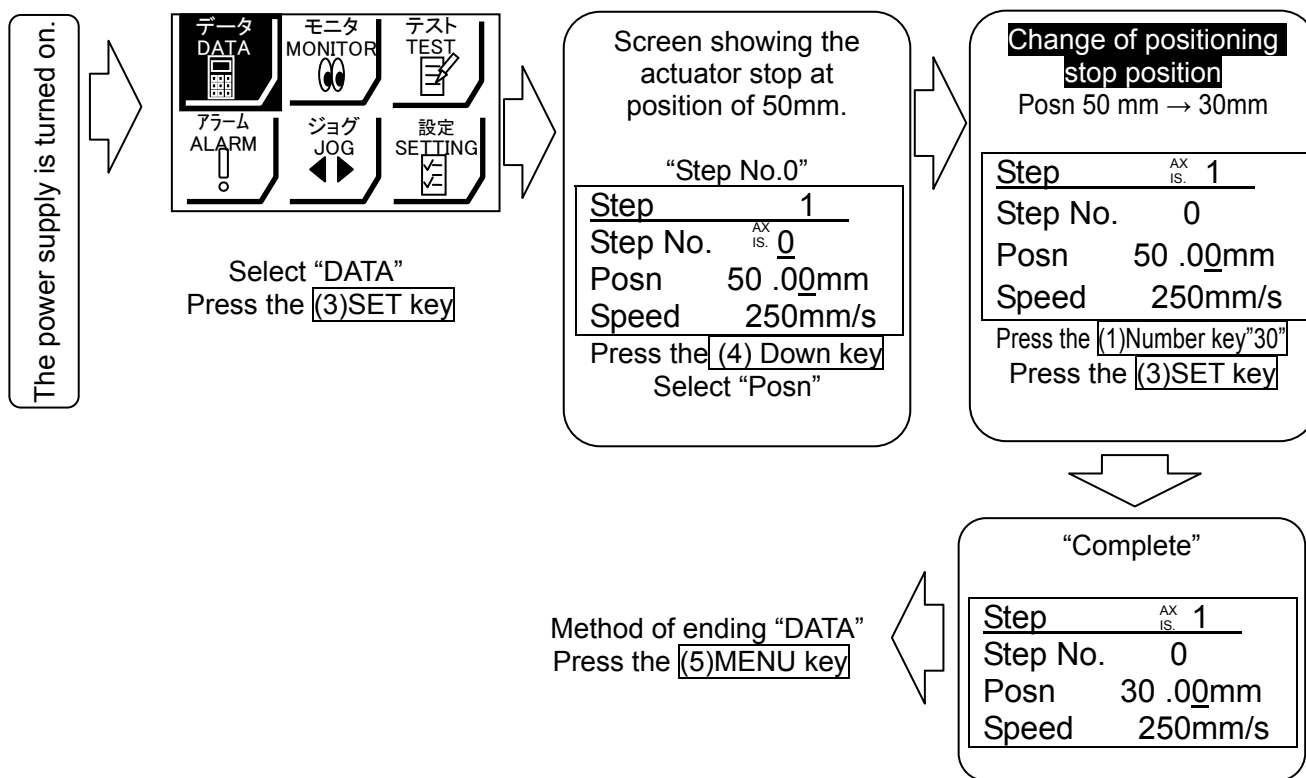

For details of operation, and relationship between operation procedure and input/ output signals, refer to section 3.3 "Step Data setting method" p. 21 to 24.

5. Teaching box detailed explanation

Please refer to the teaching box manual.

2. Specification

2.1 Slider type LEF Series / Ball screw drive Specification

(1) Step motor (servo 24VDC) Ball screw drive

| Model | | LEFS 16 | | LEFS 25 | | LEFS 32 | | | |
|---------------------------------|--|--|----------|----------------------------|----------|-------------------------------------|----------|----------|----------|
| Actuator specification | Stroke(mm) ^{Note1)} | 100,200,300,(400) | | 100,200,300,(400),500, 600 | | 100,200,300,(400),500 (600,700,800) | | | |
| | Work load(kg) ^{Note2)} | Horizontal | 9 | 10 | 20 | 20 | 40 | 45 | 45 |
| | | Vertical | 2 | 4 | 7.5 | 15 | 10 | 20 | 20 |
| | Speed (mm/s) ^{Note2)} | 10 to 500 | 5 to 250 | 12 to 500 | 6 to 250 | 16 to 500 | 8 to 250 | 8 to 250 | 8 to 250 |
| | acceleration/deceleration[mm/s ²] | 3,000 or less | | | | | | | |
| | Positioning repeatability(mm) | +/- 0.02 | | | | | | | |
| | Lead(mm) | 10 | 5 | 12 | 6 | 16 | 8 | 8 | 8 |
| | Impact resistance/ vibration resistance(m/s ²) ^{Note3)} | 50 / 20 | | | | | | | |
| | Drive method | Ball screw | | | | | | | |
| | Guide type | Linear guide | | | | | | | |
| Operating temperature range(°C) | 5 to 40 | | | | | | | | |
| Operating humidity range (%) | 90 RH or less(No condensation) | | | | | | | | |
| Electric specification | Motor size | □28 | | □42 | | □56.4 | | | |
| | Type of Motor | Step motor (Servo 24VDC) | | | | | | | |
| | Encoder | Incremental A/B phase (800 pulse/rotation) | | | | | | | |
| | Rated voltage(VDC) | 24 +/- 10% | | | | | | | |
| | Power consumption(W) ^{Note4)} | 22 | | 38 | | 50 | | | |
| | Standby power consumption when operating(W) ^{Note5)} | 18 | | 16 | | 44 | | | |
| | Momentary max. power consumption(W) ^{Note6)} | 51 | | 57 | | 123 | | | |
| Controller weight(kg) | 0.15 (Screw mounting type), 0.17(DIN rail mounting type) | | | | | | | | |
| Lock specification | Type ^{Note7)} | No excitation operating type | | | | | | | |
| | Holding force(N) | 20 | 39 | 78 | 157 | 108 | 216 | 216 | 216 |
| | Power consumption(W) ^{Note8)} | 3.6 | | 5 | | 5 | | | |
| | Rated voltage(VDC) | 24 +/-10% | | | | | | | |

Weight

| Model | LEFS16 | | | | LEFS25 | | | | | | LEFS32 | | | | | | | |
|--------------------------------|--------|------|------|-------|--------|------|------|-------|------|-------|--------|------|------|-------|------|-------|-------|-------|
| Stroke(mm) ^{Note1)} | 100 | 200 | 300 | (400) | 100 | 200 | 300 | (400) | 500 | (600) | 100 | 200 | 300 | (400) | 500 | (600) | (700) | (800) |
| Weight(kg) | 0.90 | 1.05 | 1.20 | 1.35 | 1.84 | 2.12 | 2.40 | 2.68 | 2.96 | 3.24 | 3.35 | 3.75 | 4.15 | 4.55 | 4.95 | 5.35 | 5.75 | 6.15 |
| Additional weight for lock(kg) | 0.12 | | | | 0.19 | | | | | | 0.35 | | | | | | | |

Note 1) The strokes shown in () are produced upon receipt of order.

Note 2) The speed is dependent on the workload. Check the following "Speed-workload graphs" for the selected model.

Note 3) Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz, when the actuator was tested in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Note 4) The "Power consumption" (including the controller) is for when the actuator is operating.

Note 5) The "Standby power consumption when operating" (including the controller) is for when the actuator is stopped in the set position during operation.


Note 6) The "Momentary max. power consumption" (including the controller) is for when the actuator is operating.

This value can be used for the selection of the power supply.

Note 7) Only applies to actuators supplied with a lock.

Note 8) For the actuator with lock, please add the power consumption for the lock.

<Speed-Workload graph> Horizontal Transfer

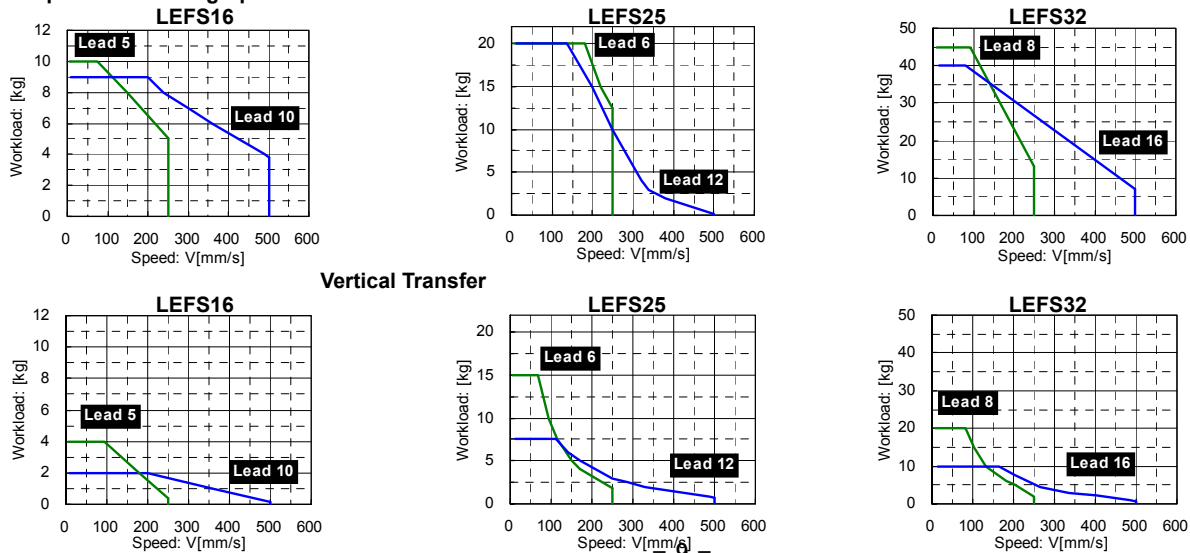

Step motor (servo 24VDC) Ball screw drive

| Model | | LEFS40 | | |
|------------------------------|--|--|-----------|----|
| Actuator specification | Stroke(mm) ^{Note1)} | 200, 300, (400), 500, (600) (700), 800, (900), (1000) | | |
| | Work load(kg) ^{Note2)} | Horizontal | 50 | 60 |
| | | Vertical | - | 23 |
| | Speed (mm/s) ^{Note2)} | 20 to 500 | 10 to 250 | |
| | acceleration/deceleration[mm/s ²] | 3,000 or less | | |
| | Positioning repeatability(mm) | +/- 0.02 | | |
| | Lead(mm) | 20 | 10 | |
| | Impact resistance/ vibration resistance(m/s ²) ^{Note3)} | 50 / 20 | | |
| | Drive method | Ball screw | | |
| | Guide type | Linear guide | | |
| | Operating temperature range(°C) | 5 to 40 | | |
| Operating humidity range (%) | 90 RH or less(No condensation) | | | |
| Electric specification | Motor size | □56.4 | | |
| | Type of Motor | Step motor (Servo 24VDC) | | |
| | Encoder | Incremental A/B phase (800 pulse/rotation) | | |
| | Rated voltage(VDC) | 24 +/- 10% | | |
| | Power consumption(W) ^{Note4)} | 100 | | |
| | Standby power consumption when operating(W) ^{Note5)} | 43 | | |
| | Momentary max. power consumption(W) ^{Note6)} | 141 | | |
| | Controller weight(kg) | 0.15 (Screw mounting type), 0.17(DIN rail mounting type) | | |
| Lock specification | Type ^{Note7)} | No excitation operating type | | |
| | Holding force(N) | 113 | 225 | |
| | Power consumption(W) ^{Note8)} | 5 | | |
| | Rated voltage(VDC) | 24±10% | | |

Weight

| Model | LEFS40 | | | | | | | | |
|--------------------------------|--------|------|-------|------|-------|-------|------|-------|--------|
| Stroke(mm) ^{Note1)} | 200 | 300 | (400) | 500 | (600) | (700) | 800 | (900) | (1000) |
| Weight(kg) | 5.65 | 6.21 | 6.77 | 7.33 | 7.89 | 8.45 | 9.01 | 9.57 | 10.13 |
| Additional weight for lock(kg) | 0.35 | | | | | | | | |

Note 1) The strokes shown in () are produced upon receipt of order.

Note 2) The speed is dependent on the workload. Check the following "Speed-workload graphs" for the selected model.

Note 3) Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz, when the actuator was tested in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Note 4) The "Power consumption" (including the controller) is for when the actuator is operating.

Note 5) The "Standby power consumption when operating" (including the controller) is for when the actuator is stopped in the set position during operation.

Note 6) The "Momentary max. power consumption" (including the controller) is for when the actuator is operating.


This value can be used for the selection of the power supply.

Note 7) Only applies to actuators supplied with a lock.


Note 8) For the actuator with lock, please add the power consumption for the lock.

<Speed-Workload graph>

LEFS40 Horizontal Transfer

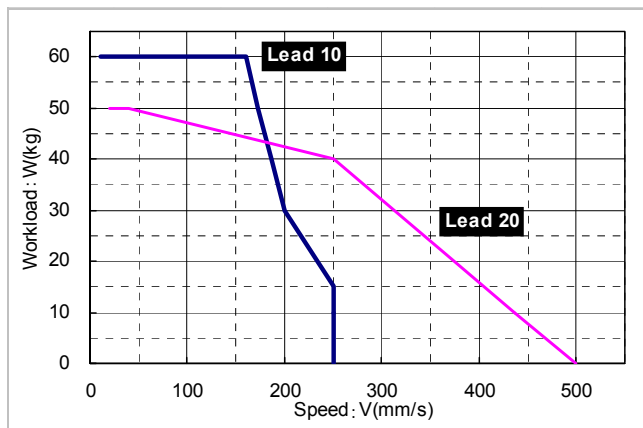

LEFS40 Vertical Transfer

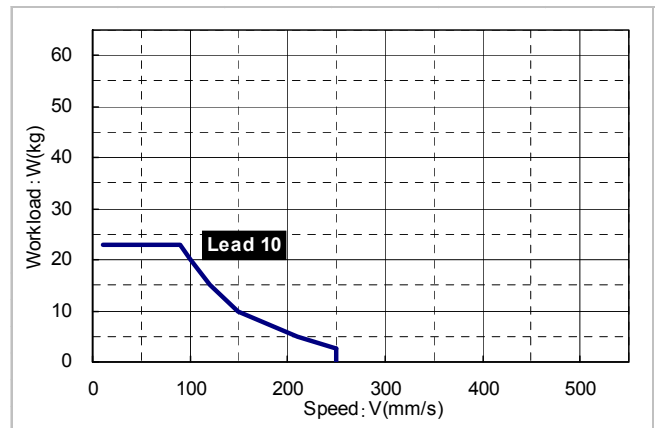

(2) Servo motor (24VDC) Ball screw drive

| Model | | LEFS16A | | LEFS25A | | |
|---------------------------------|--|--|----------|----------------------------------|----------|----|
| Actuator specification | Stroke(mm) ^{Note1)} | 100, 200, 300, (400) | | 100, 200, 300, (400), 500, (600) | | |
| | Work load(kg) ^{Note2)} | Horizontal | 7 | 10 | 11 | 18 |
| | | Vertical | 2 | 4 | 2.5 | 5 |
| | Speed(mm/s) ^{Note2)} | 10 to 500 | 5 to 250 | 12 to 500 | 6 to 250 | |
| | acceleration/deceleration[mm/s ²] | 3,000 or less | | | | |
| | Positioning repeatability(mm) | +/- 0.02 | | | | |
| | Lead(mm) | 10 | 5 | 12 | 6 | |
| | Impact resistance/ vibration resistance(m/s ²) ^{Note3)} | 50 / 20 | | | | |
| | Drive method | Ball screw | | | | |
| | Guide type | Linear guide | | | | |
| Operating temperature range(°C) | 5 to 40 | | | | | |
| Operating humidity range (%) | 90 RH or less(No condensation) | | | | | |
| Electric specification | Motor size | □28 | | □42 | | |
| | Motor output (W) | 30 | | 36 | | |
| | Type of Motor | Servo motor (24VDC) | | | | |
| | Encoder | Incremental A/B phase (800 pulse/rotation) /Z phase | | | | |
| | Rated voltage(VDC) | 24 +/- 10% | | | | |
| | Power consumption(W) ^{Note4)} | 63 | | 102 | | |
| | Standby power consumption when operating(W) ^{Note5)} | Horizontal :4 Vertical: 9 | | Horizontal :4 Vertical: 9 | | |
| | Momentary max. power consumption(W) ^{Note6)} | 70 | | 113 | | |
| Lock specification | Controller weight(kg) ^{Note7)} | 0.15 (Screw mounting type), 0.17(DIN rail mounting type) | | | | |
| | Type | No excitation operating type | | | | |
| | Holding force(N) | 20 | 39 | 78 | 157 | |
| | Power consumption(W) ^{Note8)} | 3.6 | | 5 | | |
| Rated voltage(VDC) | 24 +/-10% | | | | | |

Weight

| Model | LEFS16A | | | | LEFS25A | | | | | |
|--------------------------------|---------|------|------|-------|---------|------|------|-------|------|-------|
| Stroke(mm) ^{Note1)} | 100 | 200 | 300 | (400) | 100 | 200 | 300 | (400) | 500 | (600) |
| Weight(kg) | 0.90 | 1.05 | 1.20 | 1.35 | 1.84 | 2.12 | 2.40 | 2.68 | 2.96 | 3.24 |
| Additional weight for lock(kg) | 0.12 | | | | 0.19 | | | | | |

Note 1) The strokes shown in () are produced upon receipt of order.

Note 2) The speed is dependent on the workload. Check the following "Speed-workload graphs" for the selected model.

Note 3) Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz, when the actuator was tested in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Note 4) The "Power consumption" (including the controller) is for when the actuator is operating.

Note 5) The "Standby power consumption when operating" (including the controller) is for when the actuator which has the maximum workload is stopped in the set position during operation.


Note 6) The "Momentary max. power consumption" (including the controller) is for when the actuator is operating.

This value can be used for the selection of the power supply.


Note 7) Only applies to actuators supplied with a lock.

Note 8) For the actuator with lock, please add the power consumption for lock.

<Speed-Workload graph> Horizontal Transfer

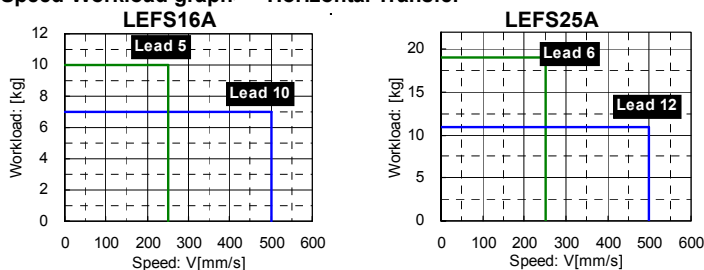

Vertical Transfer

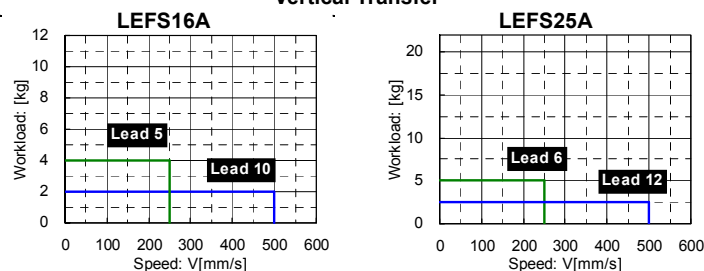

2.2 Slider type LEF Series / Belt drive Specification

(1) Step motor (servo 24VDC) Belt drive

| Model | | LEFB 16 | LEFB 25 | LEFB 32 |
|------------------------------|--|--|--|---|
| Actuator specification | Stroke(mm) ^{Note1)} | (300), 500, (600, 700), 800, (900), 1000 | (300),500,(600,700),800,(900), 1000, (1200,1500,1800,2000) | (300),500,(600,700),800,(900), 1000,(1200,1500,1800,2000) |
| | Work load(kg) ^{Note2)} Horizontal | 1 | 5 | 14 |
| | Speed (mm/s) ^{Note2)} | 48 to 1100 | 48 to 1400 | 48 to 1500 |
| | acceleration/deceleration[mm/s ²] | 3,000 or less | | |
| | Positioning repeatability(mm) | +/- 0.1 | | |
| | Lead equivalent(mm) | 48 | 48 | 48 |
| | Impact resistance/ vibration resistance(m/s ²) ^{Note3)} | 50/20 | | |
| | Drive method | Belt | | |
| | Guide type | Linear guide | | |
| | Operating temperature range(°C) | 5 to 40 | | |
| Operating humidity range (%) | 90 RH or less(No condensation) | | | |
| Electric specification | Motor size | □28 | □42 | □56.4 |
| | Type of Motor | Step motor (Servo 24VDC) | | |
| | Encoder | Incremental A/B phase (800 pulse/rotation) | | |
| | Rated voltage(VDC) | 24 +/-10% | | |
| | Power consumption(W) ^{Note4)} | 24 | 32 | 52 |
| | Standby power consumption when operating(W) ^{Note5)} | 18 | 16 | 44 |
| | Momentary max. power consumption(W) ^{Note6)} | 51 | 60 | 127 |
| Controller weight(kg) | 0.15 (Screw mounting type), 0.17(DIN rail mounting type) | | | |
| Lock specification | Type ^{Note7)} | No excitation operating type | | |
| | Holding force(N) | 4 | 19 | 36 |
| | Power consumption(W) ^{Note8)} | 3.6 | 5 | 5 |
| | Rated voltage(VDC) | 24 +/-10% | | |

Weight

| Model | LEFB16 | | | | | | | LEFB25 | | | | | | | | | | |
|--------------------------------|--------|------|-------|-------|------|-------|------|--------|------|-------|-------|------|-------|------|--------|--------|--------|--------|
| Stroke(mm) | (300) | 500 | (600) | (700) | 800 | (900) | 1000 | (300) | 500 | (600) | (700) | 800 | (900) | 1000 | (1200) | (1500) | (1800) | (2000) |
| Weight(kg) | 1.19 | 1.45 | 1.58 | 1.71 | 1.84 | 1.97 | 2.10 | 2.39 | 2.85 | 3.08 | 3.31 | 3.54 | 3.77 | 4.00 | 4.46 | 5.15 | 5.84 | 6.30 |
| Additional weight for lock(kg) | 0.12 | | | | | | | 0.19 | | | | | | | | | | |

| Model | LEFB32 | | | | | | | | | | |
|--------------------------------|--------|------|-------|-------|------|-------|------|--------|--------|--------|--------|
| Stroke(mm) | (300) | 500 | (600) | (700) | 800 | (900) | 1000 | (1200) | (1500) | (1800) | (2000) |
| Weight(kg) | 4.12 | 4.80 | 5.14 | 5.48 | 5.82 | 6.16 | 6.50 | 7.18 | 8.20 | 9.22 | 9.90 |
| Additional weight for lock(kg) | 0.35 | | | | | | | | | | |

Note 1) The strokes shown in () are produced upon receipt of order.

Note 2) The speed is dependent on the workload. Check the following "Speed-workload graphs" for the selected model.

Note 3) Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz, when the actuator was tested in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Note 4) The "Power consumption" (including the controller) is for when the actuator is operating.

Note 5) The "Standby power consumption when operating" (including the controller) is for when the actuator is stopped in the set position during operation.


Note 6) The "Momentary max. power consumption" (including the controller) is for when the actuator is operating.

This value can be used for the selection of the power supply.

Note 7) Only applies to actuators supplied with a lock.

Note 8) For the actuator with lock, please add the power consumption for the lock.

<Speed-Workload graph> Horizontal Transfer

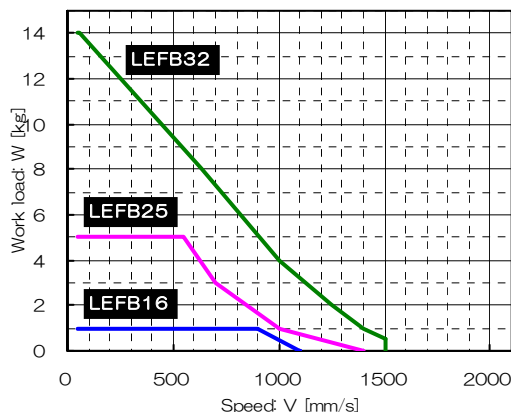

(2) Servo motor (24VDC) Belt drive

| Model | | LEFB16A | LEFB25A |
|-----------------------------|--|--|---|
| Actuator specification | Stroke(mm) ^{Note1)} | (300), 500, (600, 700), 800, (900), 1000 | (300), 500, (600,700), 800, (900), 1000, (1200, 1500, 1800, 2000) |
| | Work load(kg) ^{Note2)} Horizontal | 1 | 2 |
| | Speed (mm/s) ^{Note2)} | 48 to 2000 | 48 to 2000 |
| | acceleration/deceleration | 3,000 or less | |
| | Positioning repeatability(mm) | +/- 0.1 | |
| | Lead equivalent(mm) | 48 | 48 |
| | Impact resistance/ vibration resistance(m/s ²) ^{Note3)} | 50 / 20 | |
| | Drive method | Belt | |
| | Guide type | Linear guide | |
| | Operating temperature range(°C) | 5 to 40 | |
| Operating humidity range(%) | 90 RH or less(No condensation) | | |
| Electric specification | Motor size | □28 | □42 |
| | Motor output (W) | 30 | 36 |
| | Type of Motor | Servo motor (24VDC) | |
| | Encoder | Incremental A/B phase (800 pulse/rotation) /Z phase | |
| | Rated voltage(VDC) | 24 +/- 10% | |
| | Power consumption(W) ^{Note4)} | 78 | 69 |
| | Standby power consumption when operating(W) ^{Note5)} | 4 | 5 |
| | Momentary max. power consumption(W) ^{Note6)} | 87 | 120 |
| Lock specification | Controller weight(kg) | 0.15 (Screw mounting type), 0.17(DIN rail mounting type) | |
| | Type ^{Note7)} | No excitation operating type | |
| | Holding force(N) | 4 | 19 |
| | Power consumption(W) ^{Note8)} | 3.6 | 5 |
| Rated voltage(VDC) | 24 +/-10% | | |

Weight

| Model | LEFB16A | | | | | | | | LEFB25A | | | | | | | | | |
|--------------------------------|---------|------|-------|-------|------|-------|------|-------|---------|-------|-------|------|-------|------|--------|--------|--------|--------|
| Stroke(mm) | (300) | 500 | (600) | (700) | 800 | (900) | 1000 | (300) | 500 | (600) | (700) | 800 | (900) | 1000 | (1200) | (1500) | (1800) | (2000) |
| Weight(kg) | 1.19 | 1.45 | 1.58 | 1.71 | 1.84 | 1.97 | 2.10 | 2.39 | 2.85 | 3.08 | 3.31 | 3.54 | 3.77 | 4.00 | 4.46 | 5.15 | 5.84 | 6.30 |
| Additional weight for lock(kg) | 0.12 | | | | | | | | 0.19 | | | | | | | | | |

Note 1) The strokes shown in () are produced upon receipt of order.

Note 2) The speed is dependent on the workload. Check the following "Speed-workload graphs" for the selected model.

Note 3) Impact resistance: No malfunction occurred when the actuator was tested with a drop tester in both an axial direction and perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Vibration resistance: No malfunction occurred in a test ranging between 45 to 2000 Hz, when the actuator was tested in both an axial direction and a perpendicular direction to the lead screw. (The test was performed with the actuator in the initial state.)

Note 4) The "Power consumption" (including the controller) is for when the actuator is operating.

Note 5) The "Standby power consumption when operating" (including the controller) is for when the actuator which has the maximum workload is stopped in the set position during operation. (except during the pushing operation.)


Note 6) The "Momentary max. power consumption" (including the controller) is for when the actuator is operating.

This value can be used for the selection of the power supply.

Note 7) Only applies to actuators supplied with a lock.

Note 8) For the actuator with lock, please add the power consumption for the lock.

<Speed-Workload graph> Horizontal Transfer

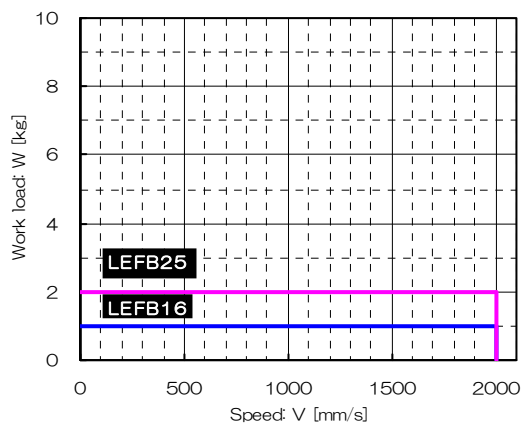

2.3 How to Order

<Ball screw drive>

LEFS 25 □ B - 100 □ - □ 1 6N 1 □

Size

| |
|----|
| 16 |
| 25 |
| 32 |
| 40 |

Motor

| Sym- bol | TYPE | Size | | | |
|----------|-------------------------|------|----|----|----|
| | | 16 | 25 | 32 | 40 |
| Nil | Step motor (Servo24VDC) | ● | ● | ● | ● |
| A | Servo motor (DC24V) | ● | ● | — | — |

Ball screw lead

| | Size | | | |
|---|------|------|------|------|
| | 16 | 25 | 32 | 40 |
| A | 10mm | 12mm | 16mm | 20mm |
| B | 5mm | 6mm | 8mm | 10mm |

Stroke

| | |
|------|--------|
| 100 | 100mm |
| § | § |
| 1000 | 1000mm |

Motor option

| | |
|-----|--------------|
| Nil | Without lock |
| B | With lock |

Controller mounting

| | |
|-----|------------------------|
| Nil | Screw mounting type |
| D | DIN rail mounting type |

I/O cable length

| Nil | Without cable |
|-----|---------------|
| 1 | 1.5m |
| 3 | 3m |
| 5 | 5m |

Controller option

| | |
|-----|-----------------------------------|
| Nil | Without controller |
| 6N | With controller (NPN) |
| 6P | With controller (PNP) |
| 1N* | With programless controller (NPN) |
| 1P* | With programless controller (PNP) |

*Only "Step motor" can be selected

Actuator cable length

| Nil | Without cable | 8 | 8m * |
|-----|---------------|---|-------|
| 1 | 1.5m | A | 10m * |
| 3 | 3m | B | 15m * |
| 5 | 5m | C | 20m * |

*produced upon receipt of order
(Only "Robotic type cable" can be selected)

Actuator cable type

| | |
|-----|--------------------|
| Nil | Without cable |
| R | Robotic type cable |
| S* | Standard cable |

*Only "Step motor" can be selected

*Applicable stroke ●Standard ○produced upon receipt of order

| | 100 | 200 | 300 | 400 | 500 | 600 | 700 | 800 | 900 | 1000 |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| LEFS16 | ● | ● | ● | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| LEFS25 | ● | ● | ● | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| LEFS32 | ● | ● | ● | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| LEFS40 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |

<Belt drive>

LEFB 25 □ T - 500 □ - □ 1 6N 1 □

Size

| |
|----|
| 16 |
| 25 |
| 32 |

Motor

| | |
|-----|--------------------------|
| Nil | Step motor (Servo 24VDC) |
| A | Servo motor (24VDC) |

Lead equivalent

| | |
|---|------|
| T | 48mm |
|---|------|

Stroke

| | |
|------|--------|
| 300 | 300mm |
| § | § |
| 2000 | 2000mm |

*Refer to the table of Applicable stroke

Motor option

| | |
|-----|--------------|
| Nil | Without lock |
| B | With lock |

Controller mounting

| | |
|-----|------------------------|
| Nil | Screw mounting type |
| D | DIN rail mounting type |

I/O cable length

| Nil | Without cable |
|-----|---------------|
| 1 | 1.5m |
| 3 | 3m |
| 5 | 5m |

Controller option

| | |
|-----|-----------------------------------|
| Nil | Without controller |
| 6N | With controller (NPN) |
| 6P | With controller (PNP) |
| 1N* | With programless controller (NPN) |
| 1P* | With programless controller (PNP) |

*Only "Step motor" can be selected

Actuator cable length

| Nil | Without cable | 8 | 8m * |
|-----|---------------|---|-------|
| 1 | 1.5m | A | 10m * |
| 3 | 3m | B | 15m * |
| 5 | 5m | C | 20m * |

*produced upon receipt of order
(Only "Robotic type cable" can be selected)

Actuator cable type

| | |
|-----|--------------------|
| Nil | Without cable |
| R | Robotic type cable |
| S* | Standard cable |

*Only "Step motor" can be selected

*Applicable stroke ●Standard ○produced upon receipt of order

| | 300 | 500 | 600 | 700 | 800 | 900 | 1000 | 1200 | 1500 | 1800 | 2000 |
|--------|-----|-----|-----|-----|-----|-----|------|------|------|------|------|
| LEFB16 | ○ | ● | ○ | ○ | ● | ○ | ● | ○ | ○ | ○ | ○ |
| LEFB25 | ○ | ● | ○ | ○ | ● | ○ | ● | ○ | ○ | ○ | ○ |
| LEFB32 | ○ | ● | ○ | ○ | ● | ○ | ● | ○ | ○ | ○ | ○ |

⚠ Caution

The actuator body and controller are sold as a package.

If when only the actuator is purchased separately, confirm that the combination of the controller, which you have and the actuator is compatible. / P.32 Notes 5.3 ⚠ Caution(1)

<Be sure to check the following before use.>

- (1) Check that actuator label for model number. This matches the controller.
- (2) Check Parallel I/O configuration matches (NPN or PNP).

(1) LEFS16A-100


NPN

(2)



2.4 Construction


<Ball screw drive (16/25/32)>

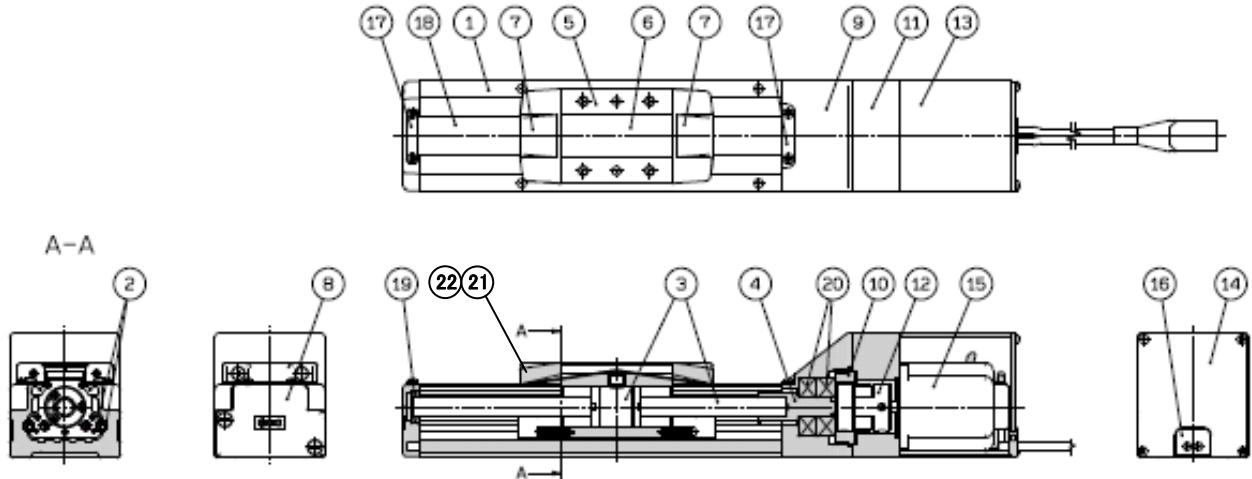

Parts list

| No. | Description | Material | Remarks | No. | Description | Material | Remarks |
|-----|------------------|-------------------|------------|-----|----------------|-----------------|----------|
| 1 | Body | Aluminium alloy | Anodized | 12 | Coupling | - | |
| 2 | Rail guide | - | | 13 | Motor cover | Aluminium alloy | Anodized |
| 3 | Ball screw Ass'y | - | | 14 | End cover | Aluminium alloy | Anodized |
| 4 | Connector shaft | Stainless steel | | 15 | Motor | - | |
| 5 | Table | Aluminium alloy | Anodized | 16 | Rubber bushing | NBR | |
| 6 | Blanking plate | Aluminium alloy | Anodized | 17 | Band holder | Stainless steel | |
| 7 | Seal band holder | Synthetic resin | | 18 | Dust seal band | Stainless steel | |
| 8 | Housing A | Aluminum die-cast | Chromating | 19 | Bearing | - | |
| 9 | Housing B | Aluminium alloy | Anodized | 20 | Bearing | - | |
| 10 | Bearing holder | Aluminium alloy | | 21 | Roller shaft | Stainless steel | |
| 11 | Motor mount | Aluminium alloy | Anodized | 22 | Wiper | - | |


<Ball screw drive (40)>

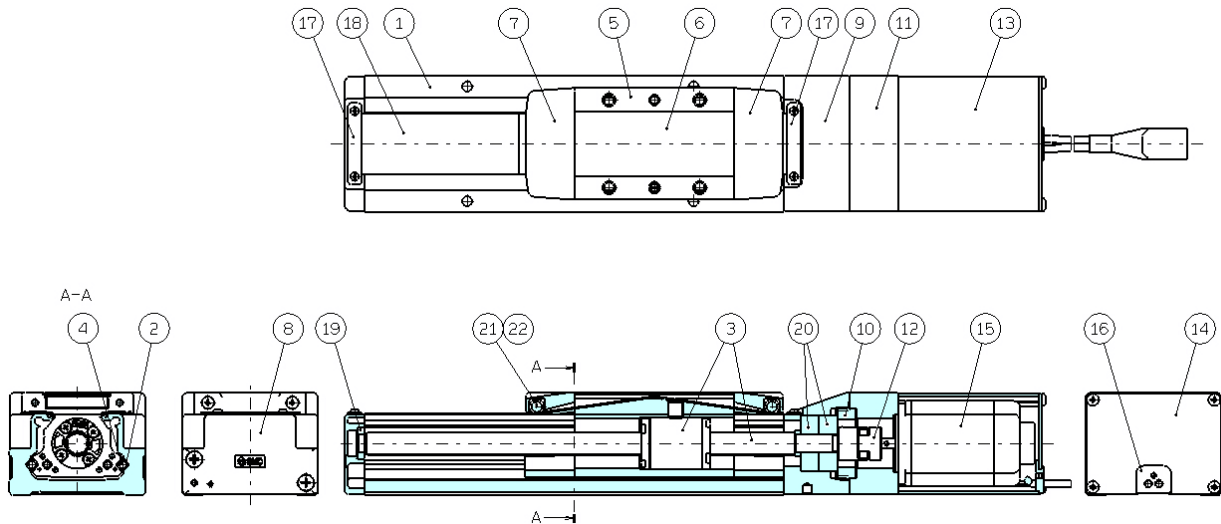

Parts list

| No. | Description | Material | Remarks | No. | Description | Material | Remarks |
|-----|------------------|-------------------|------------|-----|----------------|-----------------|----------|
| 1 | Body | Aluminium alloy | Anodized | 12 | Coupling | - | |
| 2 | Rail guide | - | | 13 | Motor cover | Aluminium alloy | Anodized |
| 3 | Ball screw Ass'y | - | | 14 | End cover | Aluminium alloy | Anodized |
| 4 | Ball | - | | 15 | Motor | - | |
| 5 | Table | Aluminium alloy | Anodized | 16 | Rubber bushing | NBR | |
| 6 | Blanking plate | Aluminium alloy | Anodized | 17 | Band holder | Stainless steel | |
| 7 | Seal band holder | Synthetic resin | | 18 | Dust seal band | Stainless steel | |
| 8 | Housing A | Aluminum die-cast | Chromating | 19 | Bearing | - | |
| 9 | Housing B | Aluminium alloy | Anodized | 20 | Bearing | - | |
| 10 | Bearing holder | Aluminium alloy | | 21 | Roller shaft | Stainless steel | |
| 11 | Motor mount | Aluminium alloy | Anodized | 22 | Wiper | - | |

<Belt drive>

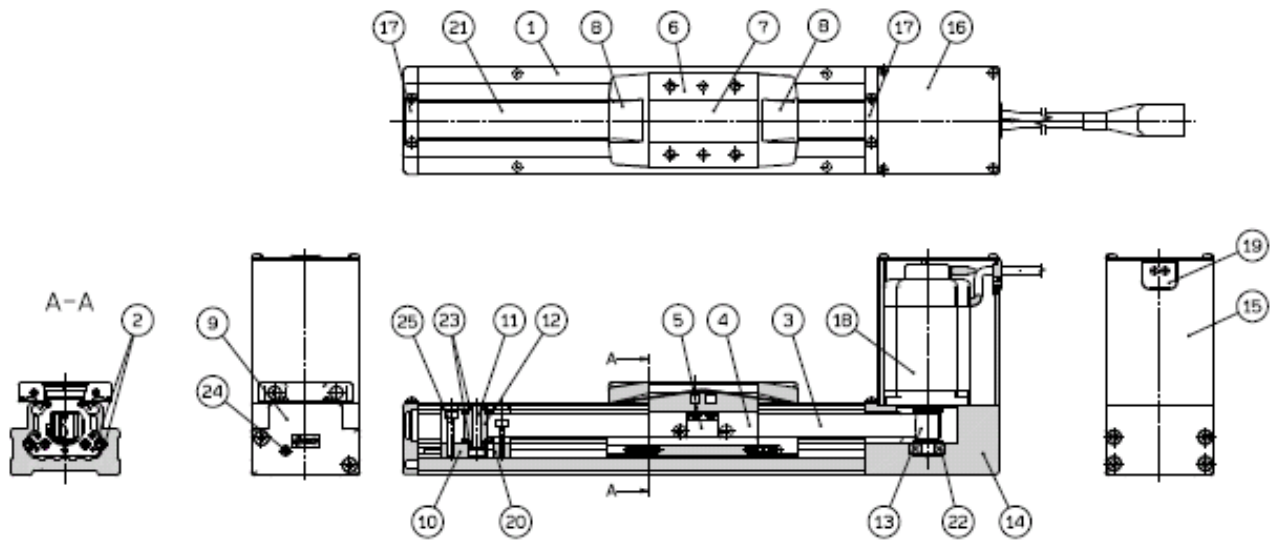


Parts list

| No. | Description | Material | Remarks |
|-----|------------------|-------------------|------------|
| 1 | Body | Aluminium alloy | Anodized |
| 2 | Rail guide | - | |
| 3 | Belt | - | |
| 4 | Belt holder A | Carbon steel | Chromating |
| 5 | Belt holder B | Aluminium alloy | Anodized |
| 6 | Table | Aluminium alloy | Anodized |
| 7 | Blanking plate | Aluminium alloy | Anodized |
| 8 | Seal band holder | Synthetic resin | |
| 9 | Housing A | Aluminum die-cast | Chromating |
| 10 | Pulley holder | Aluminium alloy | |
| 11 | Pulley shaft | Stainless steel | |
| 12 | End pulley | Aluminium alloy | Anodized |
| 13 | Motor pulley | Aluminium alloy | Anodized |

| No. | Description | Material | Remarks |
|-----|-------------------------|---------------------------|----------------|
| 14 | Motor mount | Aluminium alloy | Anodized |
| 15 | Motor cover | Aluminium alloy | Anodized |
| 16 | End cover | Aluminium alloy | Anodized |
| 17 | Band holder | Stainless steel | |
| 18 | Motor | - | |
| 19 | Rubber bushing | NBR | |
| 20 | Stopper | Aluminium alloy | |
| 21 | Dust seal band | Stainless steel | |
| 22 | Bearing | - | |
| 23 | Bearing | - | |
| 24 | Tension adjustment bolt | Chromium molybdenum steel | Nickel plating |
| 25 | Pulley holding bolt | Chromium molybdenum steel | Nickel plating |

3. Product Outline

3.1 System construction

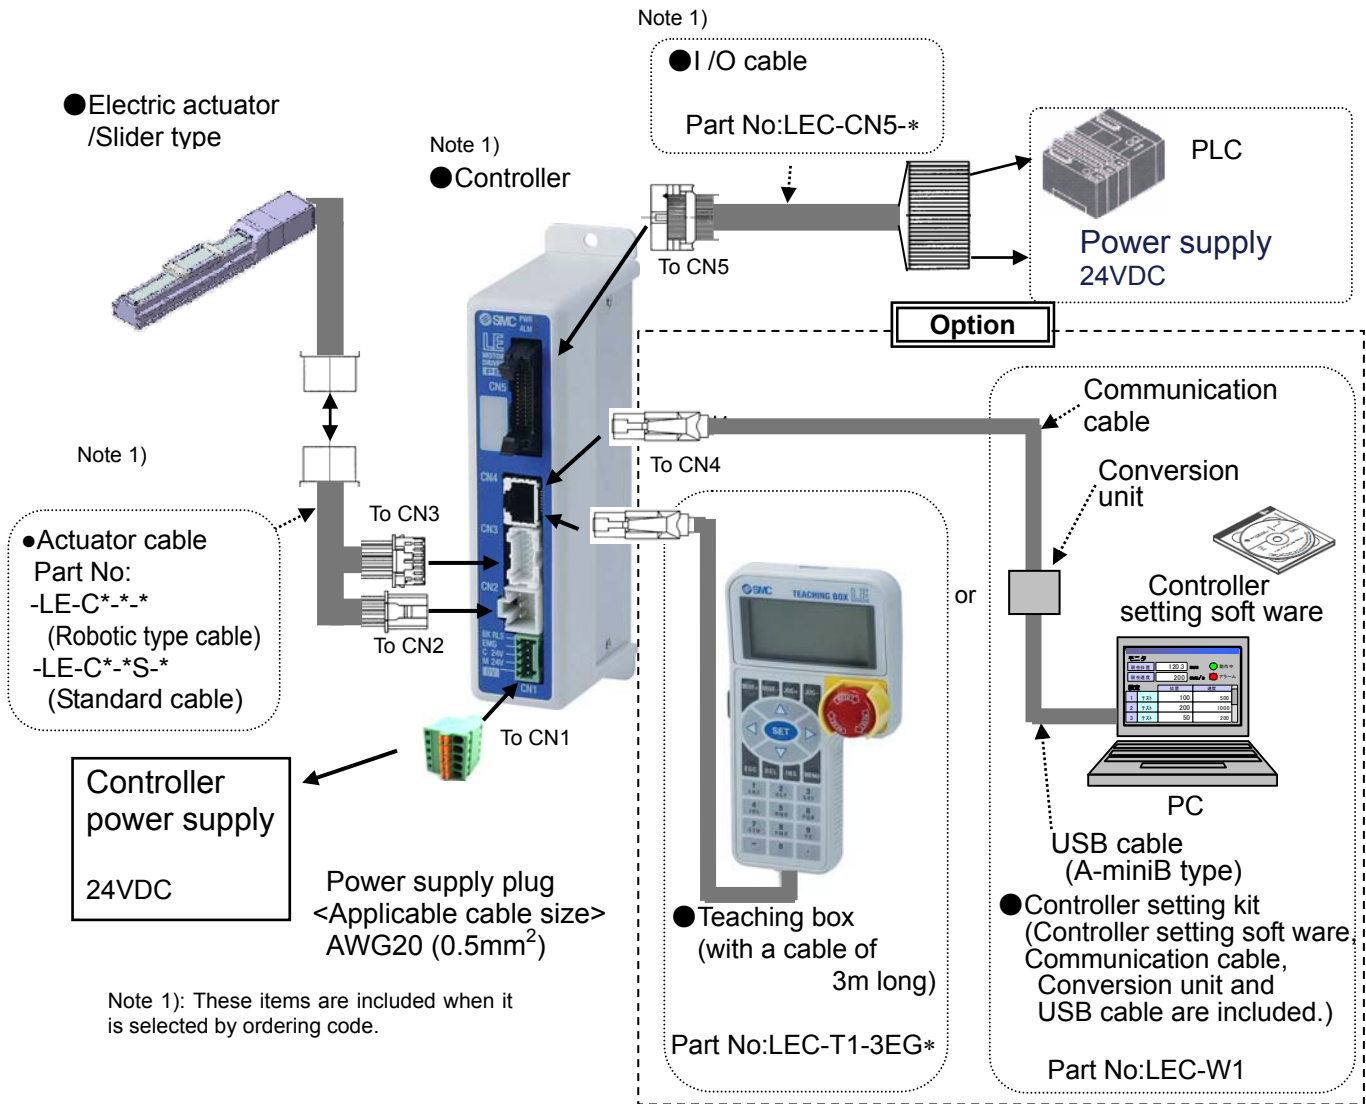

Warning

Refer to the operation manual of the LEC (controller) for detailed wiring.
/ See 4 Wiring of cables on p.30.

Communication cable is to be connected to PC by USB cable through conversion unit.
Do not connect the teaching box directly to the PC.

Use only specified cables otherwise there maybe fire risk and damage.


The actuator and controller are sold as a package.

If when only the actuator is purchased separately, confirm that the combination of the controller, which you have and the actuator is compatible.

/ See 5.3 Caution (1) on p. 32

<Be sure to check the following before use.>

- (1) Check that actuator label for model number.
This matches the controller.
- (2) Check Parallel I/O configuration matches (NPN or PNP).

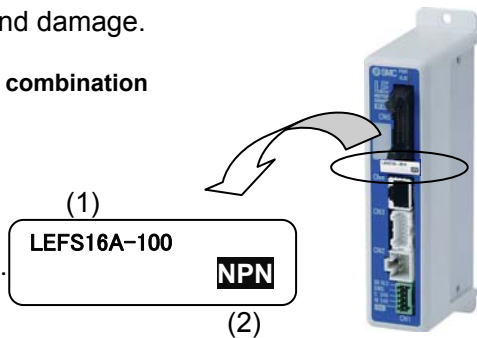

3.2 Setting Function

Refer to the operation manual of the controller (LEC series) for the detail of the setting function.

Easy Mode for simple setting

>Select “Easy mode” for instant operation

Controller setting software

- Setting and operation, such as the step data setting, test drive and JOG / fixed-distance moving, can be performed on the same page.

Annotations for the screenshot:

- JOG moving (points to Jog Speed buttons)
- Start testing (points to Drive button)
- Positioning data setting (points to Step Data table)
- Speed setting of JOG / fixed distance (points to Move Speed input field)
- Fixed distance moving (points to Move distance input field)

Teaching box

- Setting and operation by the simple screen without scrolling.
- Select function by the iconized menu at the first page.
- Step data setting and monitoring at the second page.

1st screen

2nd screen

| Data | Axis 1 |
|----------|----------|
| Step No. | 0 |
| Posn | 123.45mm |
| speed | 400mm/s |

It can be registered by “SET” after entering the values.

Example of setting the step data

1st screen

2nd screen

| Monitor | Axis 1 |
|----------|---------|
| Step No. | 1 |
| Posn | 12.34mm |
| speed | 50mm/s |

Operation status can be checked

Example of checking the operation status


Normal mode for the detailed setting

>Select “Normal mode” if the detailed setting are necessary.

- Step data can be set in detail.
- Parameters can be set.
- Signals and terminal condition can be monitored.
- JOG and fixed distance movement, return to origin position, test operation and testing of compulsory output can be done.


Controller setting soft ware

- Every function, step data, parameter, monitor and teaching are indicated in a different window.

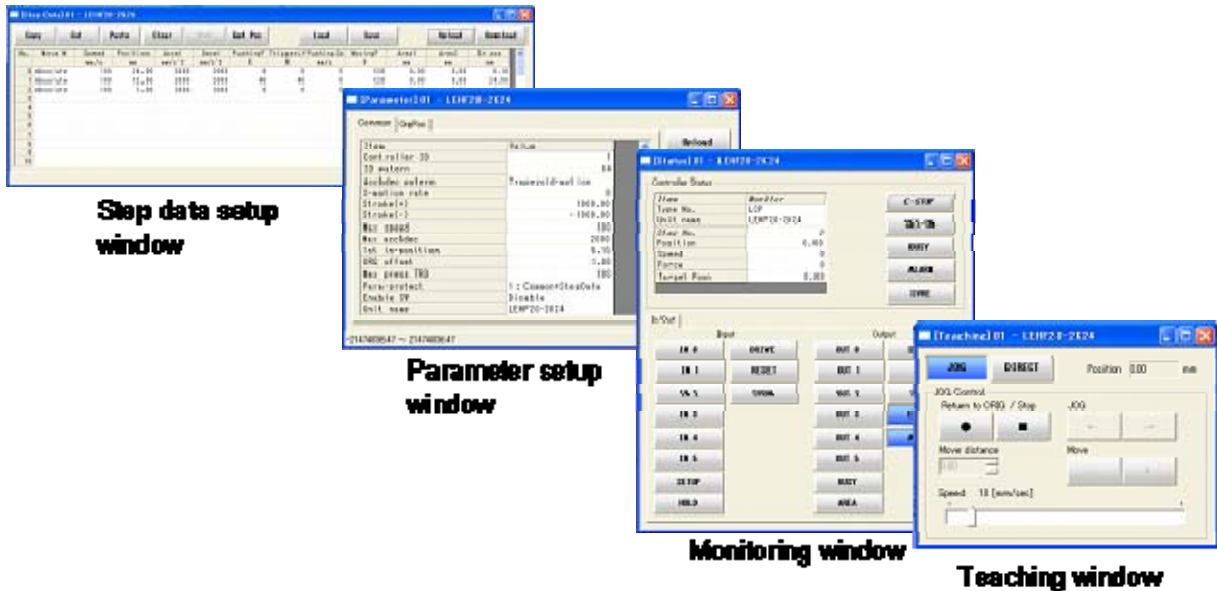

Teaching box

- The data in the controller can be saved / forwarded in this teaching box.
- Continuous test operation can be made after specifying five step data.

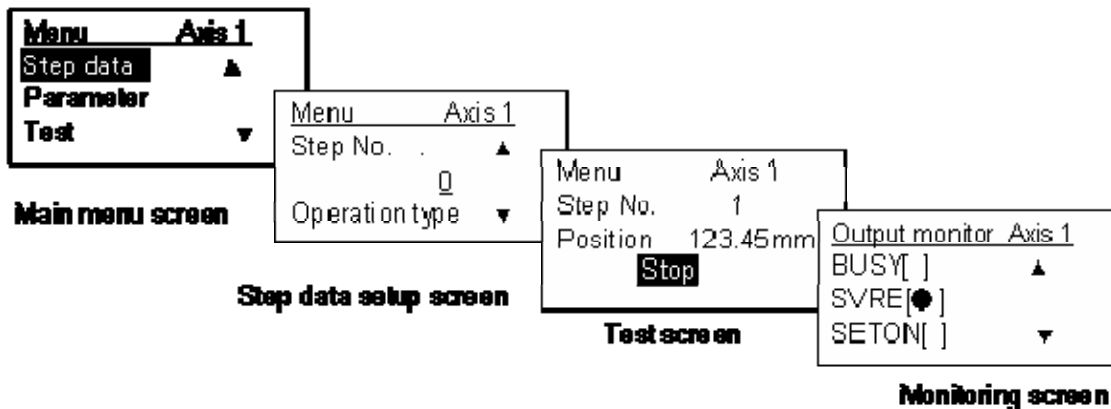

Controlled items

PC: Controller setting software

TB: Teaching box

O: Available function, x: Not available function

| Function | | Content | Easy mode | | Normal mode |
|------------------------|------------------------------|--|-----------|---------|-----------------------------|
| | | | PC | TB | PC/TB |
| Step data | Movement method | Can be selected of absolute/relative position move | ○ | × | ○ |
| | Speed | Can be set in units of 1mm/s. | ○ | ○ | ○ |
| | Position | Can be set in units of 0.01mm. | ○ | ○ | ○ |
| | Acceleration Deceleration | Can be set in units of 1mm/s ² . | ○ | ○ | ○ |
| | Pushing force | Can be set in units of 1%. / In case of positioning operation: Set to 0%. (Not available in this product) | × | × | × |
| | Trigger LV | Trigger level of target pushing force when pushing operation Can be set in units of 1%. (Not available in this product) | × | × | × |
| | Pushing speed | Can be set in units of 1mm/s. (Not available in this product) | × | × | × |
| | Moving force | 100% at step motor, 250% at servo motor (Not changeable). | ○ | × | ○ |
| | Area output | Can be set in units of 0.01mm. | ○ | × | ○ |
| | In position | During positioning operation: Width to the target position. It should be set to 0.5 or more. | ○ | × | ○ |
| Parameter (Excerpt) | Stroke(+) | + side limit of position. (Can be set in units of 0.01mm). | × | × | ○ |
| | Stroke(-) | - side limit of position (Can be set in units of 0.01mm). | × | × | ○ |
| | ORIG speed | Speed when returning to home position can be set. | × | × | ○ |
| | ORIG ACC | Acceleration when returning to origin can be set. | × | × | ○ |
| Test | JOG | It can make continuous operation at the set speed while the switch is being pressed | ○ | ○ | ○ |
| | MOVE | It can make test operation at the set distance and speed from the current position when the switch is pressed. | ○ | × | ○ |
| | Return to ORIG | Test of return to origin can be done. | ○ | ○ | ○ |
| | Test drive | The operation of the specified step data can be tested. | ○ | ○ | ○ (Continuous operation) |
| | Forced output | ON/OFF of the output terminal can be tested. | × | × | ○ |
| Monitor | DRV mon | Current position, current speed, current force and the specified step data No. can be monitored. | ○ | ○ | ○ |
| | In/Out mon | Current ON/OFF status of the input and output terminal can be monitored. | × | × | ○ |
| ALM | Status | The alarm currently being generated can be confirmed. | ○ | ○ | ○ |
| | ALM Log record | The alarm generated in the past can be confirmed. | × | × | ○ |
| File | Save - Load | The step data and parameter of the objective controller can be saved, forwarded and deleted. | × | × | ○ |
| Other | Language | Language can be changed to Japanese / English. | ○ *3 | ○ *2 | ○ *2 *3 |

*1 Every parameter is set to the recommended condition before shipment from the factory. Only change the setting of the items which require adjustment.

*2 Teaching box: In the Normal mode the teaching box can be set to work in English or Japanese.

*3 Controller setting software: Can be installed by selecting English version or Japanese version.


3.3 Step data setting method

Refer to the operation manual of the controller (LEC series) for details.

This operation manual specifies the electric actuator slider type, if an actuator other than the slider type is used, refer to the operation manual of each type of actuator and controller (LEC series) regarding the description of step data.


Caution

The actuator body and controller are sold as a package.

If when only the actuator is purchased separately, confirm that the combination of the controller, which you have and the actuator is compatible. / See 5.3  Caution(1) on P.32

<Be sure to check the following before use.>

- (1) Check that actuator label for model number.
This matches the controller.
- (2) Check Parallel I/O configuration matches (NPN or PNP).




Positioning operation

In the positioning operation, the actuator transfers to and stops at the target position. The following image shows the set items and operation.

<Confirmation of reaching the target position during the positioning operation>

When the table of actuator reaches the range of the target position, the “target position reaching signal” 【INP】 (in position) is outputted.

When the table of actuator enters the range of 【in position】, the INP output signal turns on.

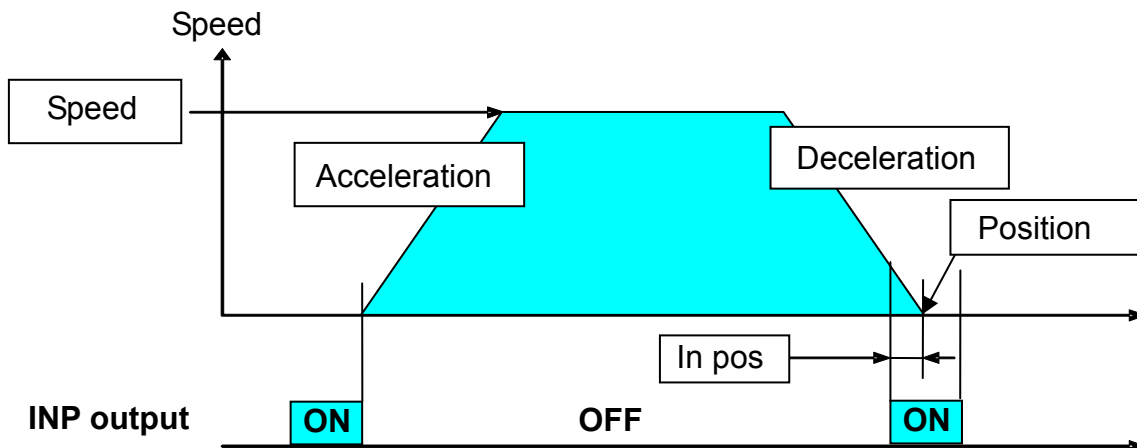

<Items and set values in positioning operation>

Step No. 1: Positioning operation

a b c d e f g h i j k

| Step data | | | | | | | | | | | | |
|-----------|----------|-------|----------|-------------------|-------------------|-----------|---------|------------|----------|-------|-------|--------|
| No. | Move M | Speed | Position | Accel | Decel | Pushing F | TriggLV | Pushing Sp | Moving F | Area1 | Area2 | In pos |
| | | mm/s | mm | mm/s ² | mm/s ² | % | % | mm/s | % | mm | mm | mm |
| 0 | Absolute | 250 | 50.00 | 3000 | 3000 | 0 | 0 | 0 | 100 | 48.00 | 50.00 | 0.50 |
| 1 | Absolute | 250 | 0.00 | 3000 | 3000 | 0 | 0 | 0 | 100 | 0.00 | 2.00 | 0.50 |

[⊙] Need to be set - [○] Need to be adjusted as required.

[×] Not used. Items don't need to be changed in positioning operation.

a < ⊙ Movement Method> When the absolute position is required, set Absolute
 When the relative position is required, set Relative
 → Absolute: Distance from the origin position. / General setting method
 Relative: Feed from the current position. / This is used when simplified data.

b < ⊙ Speed> Transfer speed to the target position.

c < ⊙ Position> Target position.

d < ○ Acceleration> The parameter which defines how rapidly the actuator reaches the speed set in b.
 The higher the set value, the faster it reaches the speed set in b.

e < ○ Deceleration> The parameter which defines how rapidly the actuator comes to stop.
 The higher the set value, the quicker it stops.

f < ⊙ Pushing force> Set
 (If values other than 0 set the operation will be changed to the pushing operation.)

g < × Trigger LV> For pushing operation only. Not applicable for this product.

h < × Pushing speed> For pushing operation only. Not applicable for this product.

i < × Moving force> Max. Force at the positioning operation.
 The force is automatically adjusted corresponding to the load.
 Set [100] % at step motor / [250] % at servo motor. (Not changeable)

j < ○ Area1, Area2> This is the condition that turns on the AREA output signal.
 The setting condition should be
 It is possible to set at relative operation too.
 The position will be Absolute (position from the origin).

Example) In case of Step no.1

[AREA] output signal is outputted between Area 1: 0 and Area 2: 2.

k < ○ In position> This is the condition that turns on the INP (in position) output signal.
 →When the electric actuator reaches the range of the target position, the INP output signal is output.
 When it is necessary to output the target position reaching signal earlier, make the value larger.

Note) Set the value more than [0.50]: LEFS, [1]: LEFB (Default).

Example) In case of Step no.1

Position: 0 + In position: 0.5 = [INP] is outputted from the value of 0.5.


Example of step data input (1)

< Positioning operation - 【INP】output signal, 【AREA】output signal >

| | a | b | c | d | e | f | g | h | i | j | k | |
|-----------|----------|-------|----------|-------------------|-------------------|-----------|---------|------------|----------|-------|-------|--------|
| Step data | | | | | | | | | | | | |
| No. | Move M | Speed | Position | Accel | Decel | Pushing F | TriggLV | Pushing Sp | Moving F | Area1 | Area2 | In pos |
| | | mm/s | mm | mm/s ² | mm/s ² | % | % | mm/s | % | mm | mm | mm |
| 0 | Absolute | 100 | 100.00 | 3000 | 3000 | 0 | 0 | 0 | 100 | 80.00 | 90.00 | 0.50 |

• Step data no.0: Positioning operation (It moves from Position: 0[mm] to Position: 100[mm])


Condition 1) The 【AREA】output signal is not used.

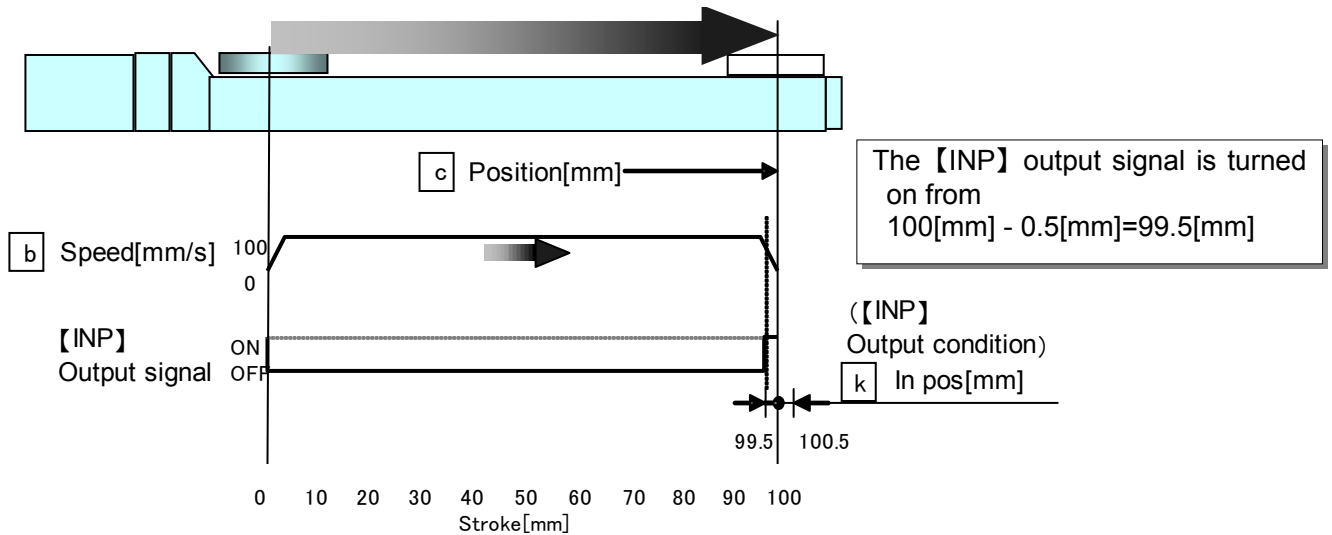

Condition 2) The 【AREA】output signal is used.

*The 【AREA】output signal is a signal output when the table traverses through a certain range (The step data: from Area 1 to Area 2).

This feature is useful when an output to check the table position at intermediate stroke is required.

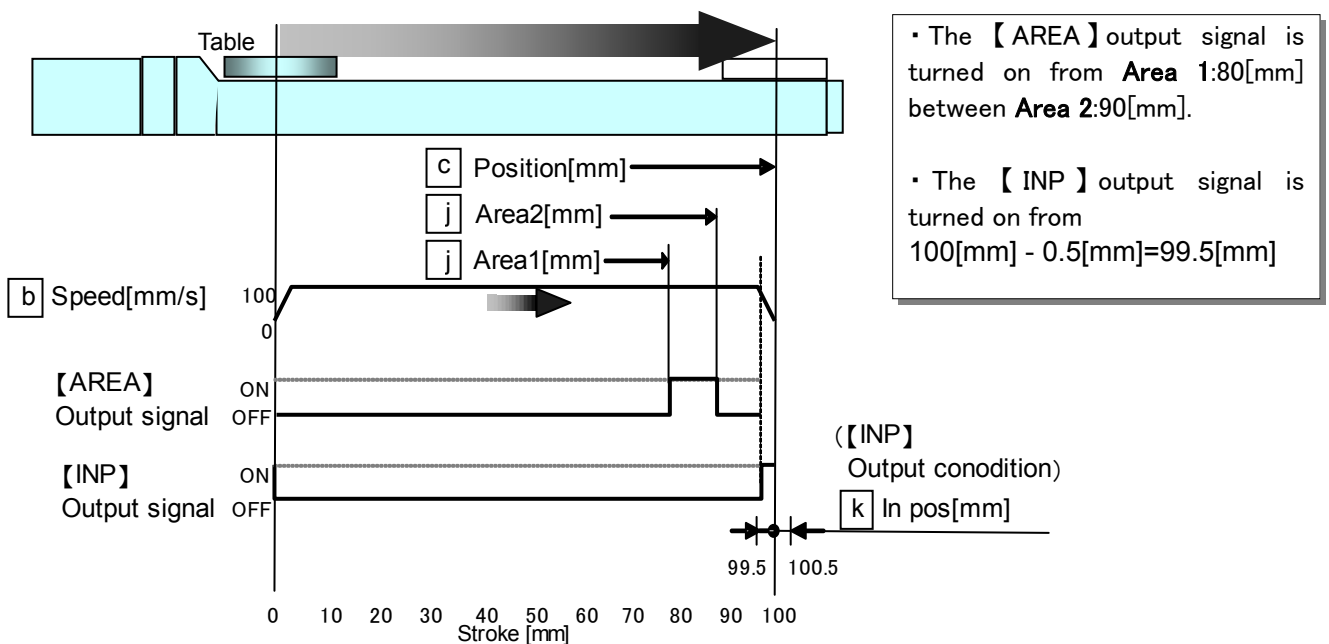

Example of step data input (2)


< Positioning operation - Relative >

| Step data | | | | | | | | | | | | |
|-----------|----------|---------------|----------------|----------------------------|----------------------------|----------------|--------------|--------------------|---------------|-------------|-------------|--------------|
| No. | Move M | Speed mm/s | Position mm | Accel mm/s ² | Decel mm/s ² | Pushing F % | TriggLV % | Pushing Sp mm/s | Moving F % | Area1 mm | Area2 mm | In pos mm |
| 0 | Relative | 100 | 10.00 | 3000 | 3000 | 0 | 0 | 0 | 100 | 10.00 | 20.00 | 0.50 |
| 1 | Relative | 100 | -10.00 | 3000 | 3000 | 0 | 0 | 0 | 100 | 10.00 | 20.00 | 0.50 |


*Absolute: Distance from the origin position. / General setting method

*Relative: Feed from the current position. / This is used when simplified data.

Condition 1) 30mm position → **Step no.0** → **Step no.0** (Move Method: Relative)

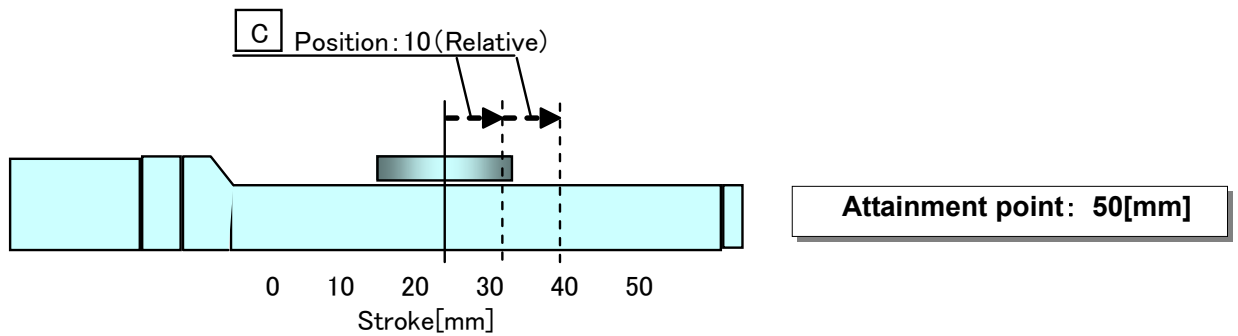

Condition 2) 30mm position → **Step no.1** → **Step no.1** (Move Method: Relative)

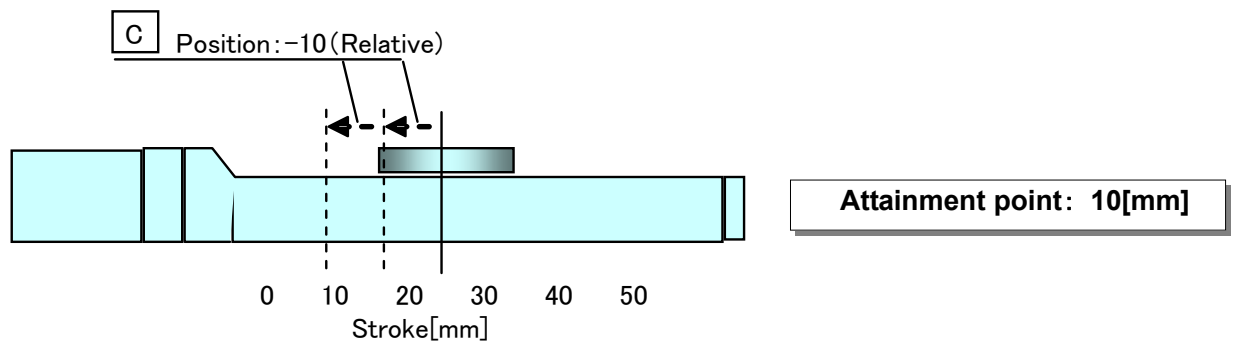

Operating procedure and input / output signals for each operation

The input / output signal and the operation description for operating this electric actuator are as follows.

1) Signals along with the operation procedures

In case the operation order is

1. Supply power to the motor → 2. Return to origin → 3. Step no. 1 → 4. Step no. 2 → 5. Cut power to the motor

| Procedure | Input signal | Output signal for the input signal | Operation description |
|-----------|--|---|--|
| 1 | SVON(Servo on)[●] | SVRE(Servo ready) [●] | Power is supplied to the motor, and detection of the magnetic pole position starts. => Completion. |
| 2 | SETUP [●] | SETON [●] INP(In position)[●] | Returning to the origin starts. =>Completion. |
| 3 | IN0 [●] IN1 [] IN2 [] IN3 [] IN4 [] IN5 [] ↓ DRIVE [●] ⇒ [] note.3)5) | OUT0 [●] OUT1 [] OUT2 [] OUT3 [] OUT4 [] OUT5 [] } note.3)4) ↓ After reaching of target position, INP [●] After stopping motion, BUSY [] | Step no. 1 is selected, and the operation starts. =>Complete. |
| 4 | IN0 [] IN1 [●] IN2 [] IN3 [] IN4 [] IN5 [] ↓ DRIVE [●] ⇒ [] note.3)5) | OUT0 [] OUT1 [●] OUT2 [] OUT3 [] OUT4 [] OUT5 [] } note.3)4) ↓ After reaching of target position, INP [●] After stopping motion, BUSY [] | Step no. 2 is selected, and the operation starts. =>Complete. |
| 5 | SVON [] | SVRE [] SETON [●] note.2) INP [●] | Power to the motor is cut. |

Note 1) [●] means ON, [] means OFF.

Note 2) The origin has been recognized when the operation is repeated, so it can operate without the procedure item 2.

Note 3) The "OUT*" signals are reset during the rising edge of the Drive signal. The "OUT*" signal which follows the "IN*" signal are outputted at the falling edge of the "drive" signal.

Note 4) When the alarm is generated, the alarm group is displayed.
Please confirm the controller (LEC series) manual for a detailed content of the alarm.

Note 5) Leave an interval of 15ms (the recommendation is 30ms) or more between input signals and maintain the state of the signal for 15ms (the recommendation is 30ms) or more, because PLC processing delays and controller scanning delays can occur.

2) Signals when Stopped: In the event when “EMG” is used

/ See 5.1 Warning (9) on p. 31

The operating sequence is 1. “Stop” → 2. Release the “Stop”

| Procedure | Input signal | Output signal for the input signal | Operation description |
|-----------|--|---|--|
| 1 | EMG: Not energizing (TB / Stop switch: Locking) | * ESTOP[] SVRE [] SETON [●] | Power to the motor is cut by the “Stop” command regardless of whether it is operating or stopping. |
| 2 | EMG: Energizing (TB / Stop switch: Releasing) | * ESTOP[●] SVRE [●] SETON [●] Note 2) | The stop is released. |

Note 1) [●] means ON, [] means OFF and *means negative logic.

Note 2) SETON signal does not change after releasing the “STOP”.

3.4 Parameter setting method

Initial setting for the basic parameters

Refer to the controller's (LEC series) operation manual for detail.

As the "basic parameter" is unique data of each actuator, if an actuator other than the "electric actuator / slider type" is used, refer to the operation manual of each actuator and the controller's (LEC series) operation manual for the basic parameter.

| Description(Extract) | Initial input value | Input range |
|-------------------------------------|----------------------------|---|
| Controller ID | 1 | 1 to 64 note1) |
| IO pattern | 1: 64 | - |
| Acceleration / deceleration pattern | 1: Trapezoid - motion | - |
| S-motion ratio | 0 | - |
| Stroke (+), note 2), 3) | Stroke + 2 | 10000 |
| Stroke (-), note 2), 3) | -2 | -10000 |
| Maximum speed | Max. speed of each product | Step data input limit: Max. speed of each product |
| Maximum acceleration / deceleration | 3000 | to 3000 |
| Default In positioning | LEFS: 0.5 LEFB: 1 | LEFS: 0.5 to product stroke LEFB: 1 to product stroke |
| Origin offset note4) | 0.00 | Origin direction: CCW: -10000 + "product stroke" to 9999 Origin direction: CW -9999 to +10000 - "product stroke" |
| Maximum pushing force | - | - |
| Parameter protect | 1: Common + StepData | Changeable parameter 1: Common + StepData, 2: Common |
| Enable switch | 2: Disable | Select 1:Enable or 2:Disable when using a teaching box |
| Model name | Part no. of each product | Only the English characters and numbers are changeable. |
| W-area output end 1 | 0.00 | - |
| W-area output end 2 | 0.00 | - |
| Origin correction data | 0.00 | - |

Note1) Become effective after restarting the controller.

Note 2) Set the stroke setting value which has the additional distance. When inputting the product stroke, the "stroke limit"alarm may be generated. (Code 1-052). (Stroke + 2mm as recommended)

Note 3) The initial input value is when the origin direction is "CCW". When the origin direction set to "CW", input "2" to the "stroke(+)" and input "-(stroke)-2" to the "stroke(-)".

Note 4) The origin offset is used for the "return to origin". / See <Origin offset> on P.29.

Initial setting for the ORIG parameters

Refer to the controller's (LEC series) operation manual for detail.

As the "ORIG parameter" is unique data of each actuator, if an actuator other than the "electric actuator / slider type" is used, refer to the operation manual of each actuator and the controller's (LEC series) operation manual for the "ORIG parameters".

| Description (Extract) | Initial input value | | Input range |
|-----------------------|---------------------|-----|----------------|
| ORIG direction | CCW note1) | | 1: CW , 2: CCW |
| ORIG mode | 1: ORIG Press | | - |
| ORIG limit | LEF** | 100 | - |
| | LEF*16A* | 150 | |
| | LEF*25A* | 250 | |
| ORIG time | LEFS | 200 | - |
| | LEFB | 200 | |
| ORIG speed | LEFS | 30 | - |
| | LEFB | 60 | |
| ORIG ACC /DEC | 1000 | | - |
| Creep speed | LEFS | 30 | - |
| | LEFB | 60 | |
| ORIG sensor | 0: Disable | | - |

Note1) CCW direction: motor side origin, CW direction: end side origin. Become effective after restarting the controller.

<Return to origin>

It is necessary to establish the origin before commencing any other operation.

1) Sequence of return to origin

Input the origin signal → Move to the origin → Stop moving (pushing) → Move to the opposite direction → Origin
(Moving distance 2mm / not changeable)

! WARNING


Do not alter any parameter except the ones shown. Or else there is a possibility of damage.

2) Method of changing direction of origin

Use the following procedures when you change the direction of the origin. Initial setting of origin is motor side.

Procedure 1- In the [Parameter] 01 dialogue box select the ORIG tab.

And the direction of the origin is changed from CCW to CW.

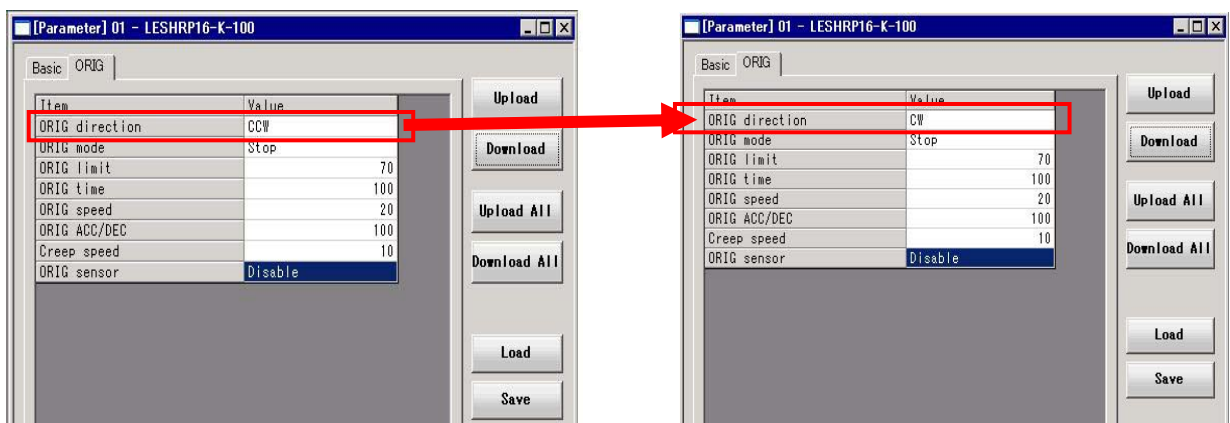

Procedure 2- In the [Parameter] 01 dialogue box press the "Download All" radio button.

Procedure 3- Power supply OFF (→ Power supply ON)

<Origin offset>


The origin offset means the value of the origin. ("Origin offset"=The display value of origin)
 When the parameter "Origin offset" is changed, the value of "Stroke(+)", "Stroke(-)" of basic parameter should be checked again.

When the parameter "Origin offset" is changed, the display value of origin is changed. The step data should be checked again.


Please refer to basic parameter on page 25 for changing of "Origin offset".

Initial input value: "Origin offset"=0. Move in the opposite direction (Moving distance 2mm / Not changeable) by the return to origin becomes "origin =0".


- a) In case of Origin direction: CCW**
 Example) Actuator stroke 50mm
 "Origin offset"=0 (Initial input value)

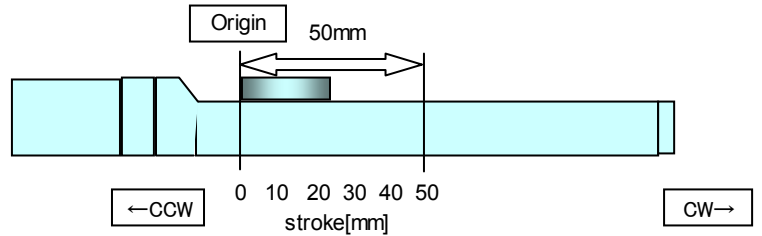


Changed to "Origin offset"=10

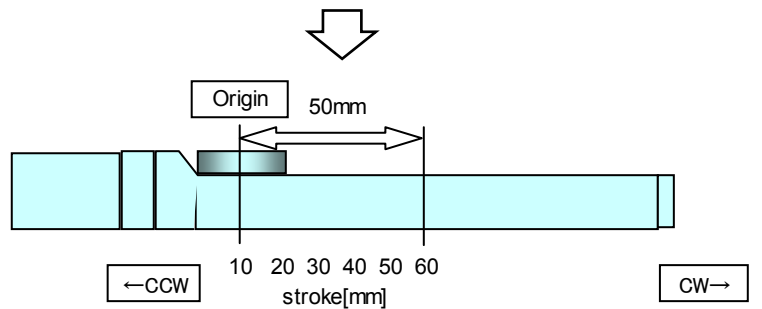


- b) In case of Origin direction: CW**
 Example) Actuator stroke 50mm
 "Origin offset"=0 (Initial input value)

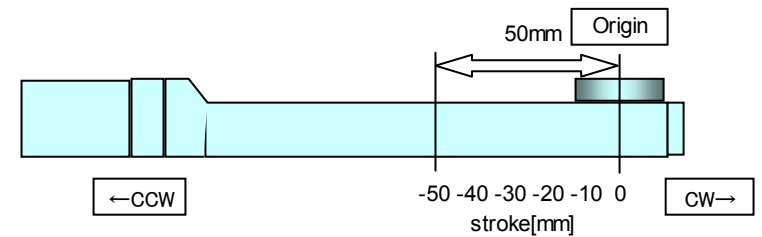

Changed to "Origin offset"=10

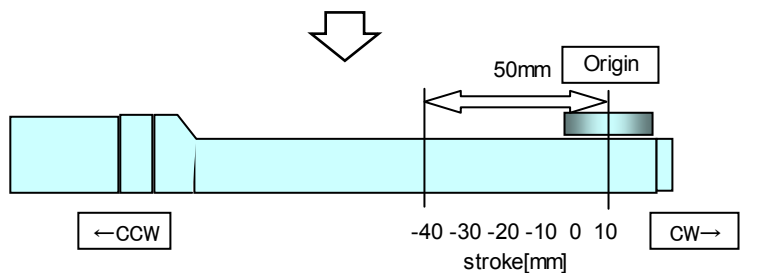

Changed to "Origin offset"=-10

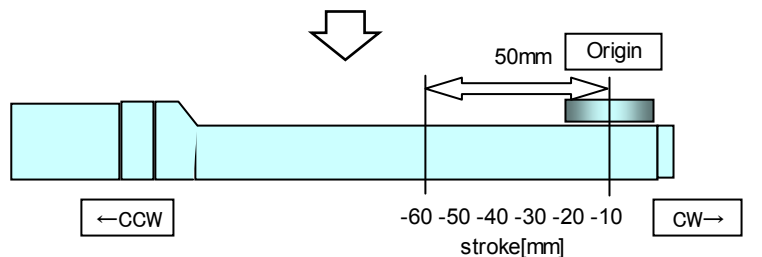

4. Wiring of cables / Common precautions

Warning

1. **Adjusting, mounting or wiring change should never be done before disconnecting the power supply to the product.**

Electrical shock, malfunction and damage can result.

2. **Do not disassemble the cables.**

Use only specified cables.

3. **Do not connect or disconnect the wires, cables and connectors when the power is turned on.**

Caution

1. **Wiring securely. Do not apply any voltage to the terminals other than those specified in the Operation Manual.**

2. **Wire the connector securely.**

3. **Take appropriate measures against noise.**

Noise in a signal line may cause malfunction. As a countermeasure separate the high voltage and low voltage cables, and shorten the wiring lengths, etc.

4. **Do not route input/output wires and cables together with power or high voltage cables.**

The product can malfunction due to interference of noise and surge voltage from power and high voltage cables to the signal line. Route the wires of the product separately from power or high voltage cables.

5. **Take care that actuator movement does not catch cables.**


6. **Operate with all wires and cables secured. Avoid bending cables at sharp angles where they enter the product.**

7. **Avoid twisting, folding, rotating or applying an external force to the cable.**

Risk of electric shock, wire breakage, contact failure and loss of control of the product can happen.

8. **Fix the motor cables protruding from the actuator in place before use.**


The motor and lock cables are not robotic type cables and can be damaged when moved. Therefore fix the cables and the connectors (part "A" in figure below) when set up.

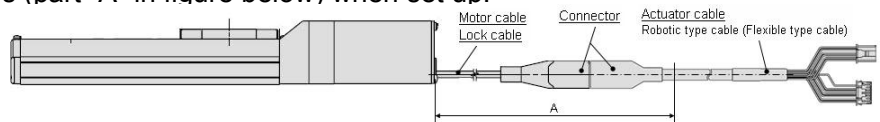

9. **Select "Robotic type cables" in case of inflecting actuator-cable repeatedly. And do not put cables into a flexible moving tube with a radius smaller than the specified value. (Min. 50mm).**

Risk of electric shock, wire break, contact failure and loss of control for the product can happen if

"Standard cables" are used in case of inflecting the cables repeatedly



10. **Confirm proper wiring of the product.**

Poor insulation (interference with other circuits, poor insulation between terminals and etc.) can apply excessive voltage or current to the product causing damage.

11. **The Speed / pushing force may vary, depending on the cable length, load and mounting conditions etc.**

If the cable length exceeds 5m, the speed/pushing force will be reduced 10% per 5m as the maximum. (if cable length is 15m: 20% reduction as the maximum.)

[Transportation]

Caution

1. **Do not carry or swing the product by the cables.**

5. Electric actuators / Common precautions

5.1 Design and selection

Warning

- 1. Be sure to read the operation manual (this manual and the one for the controller: LEC series).**

Handling or usage/operation other than that specified in the Operation Manual may lead to breakage and operation failure of the product.
Any damage attributed to the use beyond the specifications is not guaranteed.
- 2. There is a possibility of dangerous sudden action by the product if sliding parts of machinery are twisted due to external forces etc.**

In such cases, human injury may occur, such as by catching hands or feet in the machinery, or damage to the machinery itself may occur. Design the machinery should be designed to avoid such dangers.
- 3. A protective cover is recommended to minimize the risk of personal injury.**

If a driven object and moving parts of the product are in close proximity, personal injury may occur. Design the system to avoid contact with the human body.
- 4. Securely tighten all stationary parts and connected parts so that they will not become loose.**

When the product operates with high frequency or is installed where there is a lot of vibration, ensure that all parts remain secure.
- 5. Consider a possible loss of power source.**

Take measures to prevent injury and equipment damage even in the case of a power source failure.
- 6. Consider behavior of emergency stop of whole system.**

Design the system so that human injury and/or damage to machinery and equipment will not be caused, when it is stopped by a safety device for abnormal conditions such as a power outage or a manual emergency stop of whole system.
- 7. Consider the action when operation is restarted after an emergency stop or abnormal stop of whole system.**

Design the system so that human injury or equipment damage will not occur upon restart of operation of whole system.
- 8. Disassembly and modification is prohibited**

Do not modify or reconstruct (including additional machining) the product. An injury or failure can result.
- 9. Do not use the stop signal, "EMG" of the controller and stop switch on the teaching box as the emergency stop of system.**

The stop signal, "EMG" of controller and the stop switch on the teaching box are for decelerating and stopping the actuator.
Design the system with an emergency stop circuit which is applied relevant safety standard separately.
- 10. When using it for vertical application, it is necessary to build in a safety device.**

The table may fall due to the weight of work. The safety device should not interfere with normal operation of the machine.

Caution

- 1. Operate within the limits of the maximum usable stroke.**

The product will be damaged if it is used with the stroke which is over the maximum stroke. Refer to the specifications of the product.
- 2. When the product repeatedly cycles with partial strokes, operate it at a full stroke at least once every 10 strokes.**

Otherwise, lubrication can run out.
- 3. Do not use the product in applications where excessive external force or impact force is applied to it.**

The product can be damaged.
- 4. Returning to origin cannot be done during the operation.**

It cannot be done during positioning operation, pushing operation and pushing.

5. Refer to a common auto switch /matter (Best Pneumatics No 2) when an auto switch is built in and used.

5.2 Mounting

Warning

1. **Install and operate the product only after reading the Operation Manual carefully and understanding its contents. Keep the manual in a safe place for future reference.**
2. **Observe the tightening torque for screws.**
Unless stated otherwise, tighten the screws to the recommended torque for mounting the product.
3. **Do not make any alterations to this product.**
Alterations made to this product may lead to a loss of durability and damage to the product, which can lead to human injury and damage to other equipment and machinery.
4. **When an external guide is used, connect the moving parts of the product and the load in such a way that there is no interference at any point within the stroke.**
Do not scratch or dent the sliding parts of the table or mounting face etc., by striking or holding them with other objects. The components are manufactured to precise tolerances, so that even a slight deformation may cause faulty operation or seizure.
5. **Do not use the product until you verify that the equipment can be operated correctly.**
After mounting or repair, connect the power supply to the product and perform appropriate functional inspections to check it is mounted correctly.
6. **Cantilever**
When the actuator is operated at high speed while it is fixed at one end and free at the other end, a bending moment may act on the actuator due to vibration generated at the stroke end, which can damage the actuator. In such a case, install a support bracket to suppress the vibration of the actuator body or reduce the speed so that the actuator does not vibrate.
7. **When attaching to the work piece, do not apply strong impact or large moment.**
If an external force over the allowable moment is applied, it may cause looseness in the guide unit, an increase in sliding resistance or other problems.
8. **Maintenance space**
Allow sufficient space for maintenance and inspection.

5.3 Handling

Warning

1. **Do not touch the motor while in operation.**
The surface temperature of the motor can increase to approx. 90°C to 100°C due to operating conditions. Energizing alone may also cause this temperature increase. As it may cause burns, do not touch the motor when in operation.
2. **If abnormal heating, smoking or fire, etc. occurs in the product, immediately turn off the power supply.**
3. **Immediately stop operation if abnormal operation noise or vibration occurs.**
If abnormal operation noise or vibration occurs, the product may have been mounted incorrectly. Unless operation of the product is stopped for inspection, the product can be seriously damaged.
4. **Never touch the rotating part of the motor or the moving part of the actuator while in operation.**
5. **When installing, adjusting, inspecting or performing maintenance on the product, controller and related equipment, be sure to turn off the power supply to each of them. Then, lock it so that no one other than the person working can turn the power on, or implement measures such as a safety plug.**
6. **In the case of the actuator that has a servo motor (24VDC), the "motor phase detection step" is done by inputting the servo on signal just after the controller power is turned on. The "motor phase detection step" moves the table/rod for the distance of one screw-lead as the maximum. (The motor rotates in the reverse direction if the table hits an obstacle such as the end stop damper.) Take the "motor phase detection step" into consideration for the installation and operation of this actuator.**

Caution

1. **Keep the controller and product combined as delivered for use.**
The product is set in parameters for shipment. If it is combined with a different product parameter, failure can result.
2. **Check the product for the following points before operation.**
 - a) Damage to power supply line and signal line.

- b) Looseness of the connector to each power line and signal line.
 - c) Looseness of the actuator /cylinder and controller /driver mounting
 - d) Abnormal operation
 - e) Emergency stop of the total system
3. **When more than one person is performing work, decide on the procedures, signals, measures and resolution for abnormal conditions before beginning the work. Also, designate a person to supervise work other than those performing work.**
 4. **Actual speed of the product will be changed by the workload.**
Before selecting a product, check the catalog for the instructions regarding selection and specifications.
 5. **Do not apply a load, impact or resistance in addition to a transferred load during return to origin.**
In the case of the return to origin by pushing force, additional force will cause displacement of the origin position since it is based on detected motor torque.
 6. **Do not remove the nameplate.**
 7. **Operation test should be performed by low speed. Start operation by predefined speed after confirming there are no problems.**

[Ground]

Warning

1. **Please give the ground to the actuator.**
2. **The ground should be exclusive use. (Less than 100Ω)**
3. **The ground cable length should be as short as possible.**

[Unpackaging]

Caution

1. **Check the received product is as ordered.**
If the different product is installed from the one ordered, injury or damage could result.

5.4 Operating environment

Warning

1. **Avoid use in the following environments.**
 - a. Locations where a large amount of dusts and cutting chips are airborne.
 - b. Locations where the ambient temperature is outside the range (refer to specifications).
 - c. Locations where the ambient humidity is outside the range (refer to specifications).
 - d. Locations where corrosive gas, flammable gas, sea water, water and steam are present.
 - e. Locations where strong magnetic or electric fields are generated.
 - f. Locations where direct vibration or impact is applied to the product.
 - g. Areas that are dusty, or are exposed to splashes of water and oil drops.
 - h. Areas exposed to direct sunlight (ultraviolet ray).
2. **Do not use in an environment where the product is directly exposed to liquid, such as cutting oils.**
If cutting oils, coolant or oil mist contaminates the product, failure or increased sliding resistance can result.
3. **Install a protective cover when the product is used in an environment directly exposed to foreign matters such as dust, cutting chips and spatter.**
Play or increased sliding resistance can result.
4. **Shade the sunlight in the place where the product is applied with direct sunshine.**
5. **Shield the product if there is a heat source nearby.**
When there is a heat source surrounding the product, the radiated heat from the heat source can increase the temperature of the product beyond the operating temperature range. Protect it with a cover, etc.
6. **Grease oil can be decreased due to external environment and operating conditions and it deteriorates lubrication performance to shorten the life of the product.**

[Storage]

Warning

1. **Do not store the product in a place in direct contact with rain or water drops or is exposed to harmful gas or liquid.**
2. **Store in an area that is shaded from direct sunlight and has a temperature and humidity within the specified range (-10°C to 60°C and 90%RH or less No condensation or freezing).**
3. **Do not apply vibration and impact to the product during storage.**

5.5 Maintenance

Warning

1. **Do not disassemble or repair the product.**
Fire or electric shock can result.
2. **Before modifying or checking the wiring, the voltage should be checked with a tester 5 minutes after the power supply is turned off.**
Electrical shock can result.

Caution

1. **Maintenance should be performed according to the procedure indicated in the Operating Manual.**
Incorrect handling can cause an injury, damage or malfunction of equipment and machinery.
2. **Removal of product**
When equipment is serviced, first confirm that measures are in place to prevent dropping of work pieces and run-away of equipment, etc, and then cut the power supply to the system. When machinery is restarted, check that operation is normal with actuators in the proper positions.

[Lubrication]

Caution

1. **The product has been lubricated for life at manufacturer, and does not require lubrication in service.**
Contact SMC if lubrication will be applied.

5.6 Precautions for actuator with lock

Warning

1. **Do not use the lock as a safety lock or a control that requires a locking force.**
The lock used for the product with a lock is designed to prevent dropping of work piece.
2. **For vertical mounting, use the product with a lock.**
If the product is not equipped with a lock, the product will move and drop the work piece when the power is removed.
3. **"Measures against drops" means preventing a work piece from dropping due to its weight when the product operation is stopped and the power supply is turned off.**
4. **Do not apply an impact load or strong vibration while the lock is activated.**
If an external impact load or strong vibration is applied to the product, the lock will lose its holding force and damage to the sliding part of the lock or reduced lifetime can result. The same situation will happen when the lock slips due to a force higher than its holding force, as this will accelerate the wear to the lock.
5. **Do not apply liquid or oil and grease to the lock or its surrounding.**
When liquid or oil and grease is applied to the sliding part of the lock, its holding force will be reduced significantly.
6. **Take "measures against drops" and check that safety is assured before mounting, adjustment and inspection of the product.**
If the lock is released with the product mounted vertically, a work piece can drop due to its weight.
7. **When the actuator is operated manually (when SVRE output signal is off), supply 24DCV to the [BK RLS] terminal of the power supply connector.**
If the product is operated without releasing the lock, wearing of the lock sliding surface will be accelerated, causing reduction in the holding force and the life of the locking mechanism.
8. **Do not supply 24VDC power supply constantly to the [BK RLS(Lock release)] terminal.**
Stop supplying 24VDC power supply to the [BK RLS(Lock release) terminal during normal operation. If power is supplied to the [BK RLS] terminal continuously, the lock will be released, and workpieces may be dropped at stop (EMG).
/Refer to the operation manual of LEC (controller) for details of wiring.

6. Electric actuators / Slider type Common precautions

6.1 Design and selection

Warning

- 1. Do not apply a load in excess of the actuator specification.**
A product should be selected based on the maximum work load and allowable moment.
If the product is used outside of the operating specification, eccentric load applied to the guide will become excessive and have adverse effects such as creating play in the guide, reduced accuracy and reduced product life.
- 2. Do not exceed the speed limit of the actuator specification.**
Select a suitable actuator by the relationship of allowable work load and speed.
Noise or reduction of accuracy may occur if the actuator is operated in excess of its specification and could lead to reduced accuracy and reduced product file.
- 3. Do not use the product in applications where excessive external force or impact force is applied to it.**
This can lead to premature failure of the product.
- 4. When the product repeatedly cycles with partial strokes (see the table below), operate it at a full stroke at least once every 10 strokes.**
Otherwise, lubrication can run out.

| Model | Partial stroke |
|--------|----------------|
| LEF□16 | 40mm or less |
| LEF□25 | 65mm or less |
| LEF□32 | 70mm or less |
| LEFS40 | 105mm or less |

- 5. Actuator sizing is necessary with the total workload including the external force if external force is added on the actuator table.**
When mounting cable-duct to actuator, the resistance of actuator table may increase. It causes an overload alarm, so pay attention to the resistance.

6.2 Handling

Caution

- 1. INP output signal**
 - 1) Positioning operation**
When the product comes within the set range by step data [In position], output signal will be turned on. Set to [0.50] for LEFS and [1] for LEFB, or higher.
- 2. Do not change the positioning force from initial setting.**
If the positioning force is changed, it may cause a decrease in performance.
- 3. Do not operate by fixing the table and moving the actuator body.**
An excessive load will be applied to the table, which could lead to damage to the actuator and reduced accuracy and reduced product life.
- 4. Belt drive actuator cannot be used for vertically mounted applications.**
- 5. Check the specification for the minimum speed of each actuator.**
- 6. In the case of the belt driven actuator, vibration may occur during operation at speeds within the actuator specification, this could be caused by the operating conditions.**
Change the speed setting to a speed that does not cause vibration.


6.3 Mounting

⚠ Caution

1. **Keep the flatness of mounting surface to within 0.1mm or less.**
Insufficient flatness of the work piece or the surface onto which the actuator body is to be mounted can cause play in the guide and increased sliding resistance.
2. **When mounting the workpiece or other device to the actuator tighten the fixing screws with adequate torque within the specified torque range.**

Tightening the screws with a higher torque than the maximum may cause malfunction, whilst tightening with a lower torque can cause the displacement of the mounting position or in extreme conditions detaching of the work piece.

Work piece mounting

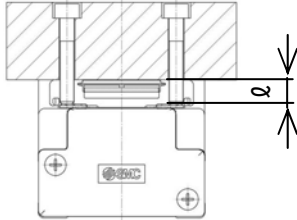


| Model | Bolt size | Maximum tightening torque [Nm] | ℓ (Maximum thread depth [mm]) |
|--------|-----------|--------------------------------|-------------------------------|
| LEF□16 | M4x0.7 | 1.5 | 6 |
| LEF□25 | M5x0.8 | 3 | 8 |
| LEF□32 | M6x1 | 5.2 | 9 |
| LEFS40 | M8x1.25 | 12.5 | 14 |

Use screws with adequate length, but with length less than the maximum thread depth. The use of screws that are too long can touch the body and cause malfunction.

3. **When mounting the actuator, use screws with adequate length and tighten them to the adequate torque. And use all mounting holes to maintain the catalogue performance.**

Tightening the screws with a higher torque than recommended may cause malfunction, whilst the tightening with lower torque can cause the displacement of mounting position or in extreme conditions the actuator could become detached from its mounting position.

Actuator mounting



| Model | Bolt size | φA (mm) | ℓ (mm) |
|--------|-----------|---------|--------|
| LEF□16 | M3 | 3.5 | 20 |
| LEF□25 | M4 | 4.5 | 24 |
| LEF□32 | M5 | 5.5 | 30 |
| LEFS40 | M6 | 6.5 | 34 |

4. **When mounting the actuator, leave a gap of 40mm or more to allow for bending of the actuator cable.**

6.4 Precaution on maintenance

⚠ Warning

1. **Turn off the power supply before maintenance and replacement of the product.**
2. **Put on protective goggles when applying grease.**

[Maintenance frequency]

Perform maintenance according to the table below. Contact SMC if any abnormality is found.

| Frequency | Appearance check | Internal check | Belt check |
|---|------------------|----------------|------------|
| Inspection before daily operation | ○ | — | — |
| Inspection every six months / 1000km / 5million cycle * | ○ | ○ | ○ |

*Whichever occurs first.

[Items for visual appearance check]

1. Loose screws. Abnormal dirt.
2. Check of flaws/faults and cable connections.
3. Vibration, noise.

[Items for internal check]

1. Lubricant condition on moving parts.
2. Loose or mechanical play in fixed parts or fixing screws.

[Items for belt check]

Check the belt regularly as shown in “maintenance frequency”.

Stop operation immediately and contact SMC when the belt appears to be like photographs shown below.

a. Tooth shape canvas is worn out

- Canvas fiber becomes fuzzy.
- Rubber is removed and the fiber becomes whitish.
- Lines of fibers become unclear.



Teeth become fuzzy

b. Peeling off or wearing of the side of the belt

Belt corner becomes round and frayed thread sticks out.



c. Belt partially cut

Belt is partially cut. Foreign matter caught in teeth other than cut part causes flaw.

d. Vertical line of belt teeth

Flaw, which is made when the belt runs on the flange.

e. Rubber back of the belt is softened and sticky.

f. Crack on the back of the belt



6.5 How to detach and attach the dust seal band


For the internal-check as the maintenance, the method of detaching and attaching the dust seal band is shown as the following.

<Dis-assembly>


1. Loosen the fixing bolts of end side of the "Band holder".
(The picture shows LEFB, but LEFS is same instruction as LEFB.)

Pay attention to not cut hand on the edges of the "Dust seal band".


Note: The "Dust seal band" can only be removed by loosening the "Band holder" bolts.

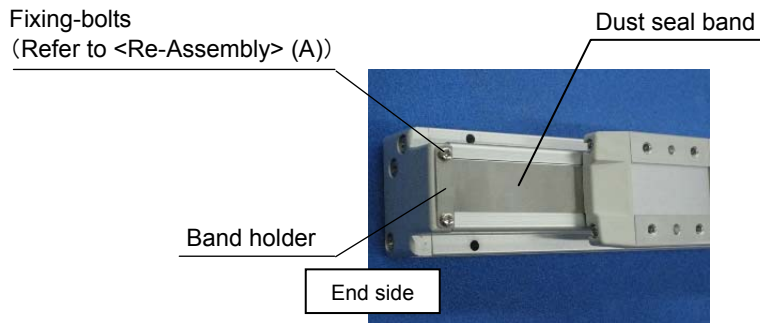

2. Remove the "Seal band holder" and the "plate" as shown.

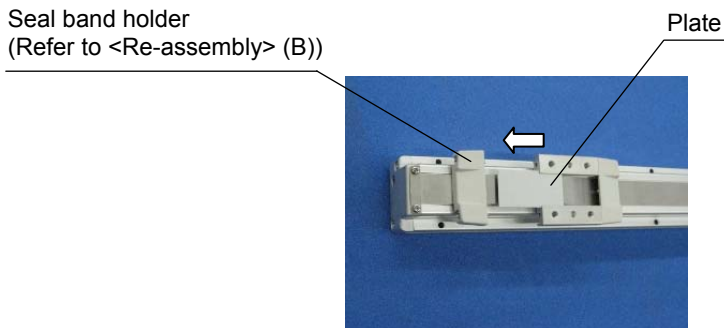

3. Loosen the fixing bolts of motor side of the "Band holder" and then remove the "Dust seal band".

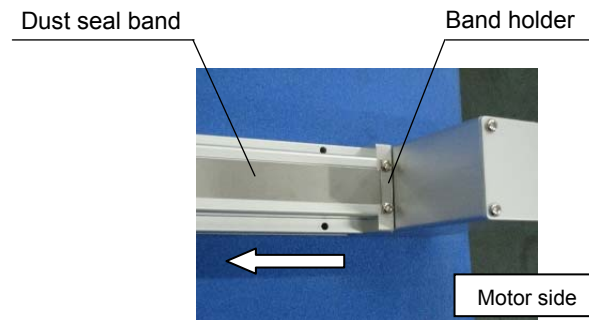

<Re-assembly>

The re-assembly is completed by the reverse procedure of "Dis-assembly" sections 1, 2 and 3.

(A)

| Model | Type of bolt | Bolt size |
|--------|------------------------------|-----------|
| LEF□16 | Round head combination screw | M2.5x5 |
| LEF□25 | Round head combination screw | M3x6 |
| LEF□32 | Round head combination screw | M3x6 |
| LEFS40 | Round head combination screw | M3x6 |

(B)


| Model | Type of bolt | Bolt size |
|--------|---------------------------------|-----------|
| LEF□16 | Cross recessed round head screw | M2.5x16 |
| LEF□25 | Cross recessed round head screw | M3x20 |
| LEF□32 | Cross recessed round head screw | M4x30 |
| LEFS40 | Round head combination screw | M4x35 |


7. Troubleshooting

Alarms below are abstract of representative examples.



For other alarms, see operation manual of controller.

| No. | Phenomenon | Cause | Countermeasure |
|--|--|--|---|
| 1 | Fail to operate / Initial stage | 1) The cable is not connected or has been disconnected. | Check if the cable is properly installed / /See 4. Wiring of cable on p. 30 |
| | When power is supplied, alarm for "Phase Det ALM /code: 1-193" is generated. ↓ <Procedure of restart> "Turn the power supply off." ↓ "Turn the power supply on" | 2) The load/resistance being applied to the actuator constantly exceeds the actuators specification. | Keep load and resistance within specification range. Check the actuator mounting condition or check if external force adds the resistance of actuator table by using movable cable-duct. /See 2.1 Specifications on p.9 |
| | | 3) The combination of the controller and actuator is not correct. | The controller and the actuator combination at the time of shipment should not be changed. /See 5.3.⚠Caution (1) on p.32 |
| | | 4) Excessive external force is being applied, (including vibration) or impact load. | Operate within the specified range. /See 2.1 Specifications on p.9 |
| | Alarm for "Step data ALM1/code:1-048" is generated ↓ <Procedure of restart> Input the "RESET" signal. | Setting condition for step data is not correct. < Correct set condition > (1)Area 1 < Area 2 | Review the content of step data. / Refer to the LEC controller operation manual. |
| Alarm for "Servo off ALM/code: 1-098" is generated ↓ <Procedure of restart> Input the "RESET" signal. | Perform the "Return to origin", the positioning operation and JOG operation during the "SVON": OFF. | Provide the operation instruction after confirming that the input signal [SVON] is ON and then the output signal [SVRE] is ON. | |
| Alarm for "Drive ALM/code: 1-099" is generated. ↓ <Procedure of restart> Input the "RESET" signal. | Perform positioning operation before the "return to origin". | Provide the operation instruction after confirming that the input signal [SETUP] is ON and then the output signal [SETON] is ON. | |

| No. | Phenomenon | Cause | Countermeasure |
|---|--|---|--|
| 2 | <p>Operation not completed / Operation continue</p> <p>Alarm for “Over load/code: 1-148” or “Posn failed/code: 1-149” is generated.</p> <p style="text-align: center;">↓</p> <p style="text-align: center;"><Procedure of restart></p> <p>Controller version /SV1.0 or later</p> <p>1. Input the “reset signal.” →“SVRE”: Automatically ON</p> <p>Controller version /SV0.8* or before</p> <p>1. Input the “reset signal.” →“SVRE”: Automatically ON</p> <p>2. Input the “setup signal.” → Restart operation after the completion of the “return to origin”.</p> <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <p><u>Label position for controller versior</u></p>  <p>Position : Bottom SV1.0*</p> </div> | 1) Added excessive external force (including vibration) or impact load. | Operate within the specified range. /See 2.1 Specifications on p.9 |
| | | 2) The Power supply does not have sufficient capacity. | Check the power consumption for each actuator and controller: If necessary replace the existing power supply with a power supply with sufficient capacity. /See 2.1 Specifications on p.9 |
| | | 3) Load/resistance more than specified range is being applied to the actuator. | Use within specification range. Check the actuator mounting condition or check if external force adds the resistance of actuator table by using movable cable-duct. /See 2.1 Specifications on p.9 |
| | | 4) Pushing operation is performed at “Positioning operation” | Review the content of the step data. |
| | | 5) The cable is not connected or has been disconnected. | Confirm that the cable is connected correctly. /See 4. Wiring of cable on p.30 |
| | | 6) It was not the intended origin position because the actuator pinched the work-piece during the “return to origin”. | Remove the work-piece and restart the return to the intended origin position. |
| | | 7) Actuator mouting condition is not good. | Check the actuator mounting surface. Keep the flatness of mounting surace to within 0.1mm or less. |
| | | 8) Wrong input [0] is input as the positioning force. | Check the step data.<Moving force> /See 3.3.Step data setting method on p.21 |
| | | 9) The step data position is not changed correctly after the return to origin direction is changed. | Check the step data. <Position> /See 3.3.Step data setting method on p.21 |
| | | 10) Because the operation of the step data is set to [INC/relative], the table comes into contact with an external object and does not move due to continuous operation. | Check the step data. <Position> /See 3.3.Step data setting method on p.21 |
| <p>Operation not completed / Operation continue</p> <p>Alarm for “Stroke limit/code: 1-052” is generated.</p> <p style="text-align: center;">↓</p> <p style="text-align: center;"><Procedure of restart></p> <p>Input the “RESET” signal.</p> | 1) Moving distance exceeds the “Stroke(+)” / “Stroke(-).” | 1) Check the value of the “Position” of step data and the value of the “Stroke(+)” / “Stroke(-)” of the basic parameter. /See 3.3.Step data setting on p.21 3.4.Parameter setting on P.27 /Refer to the LEC controller operation manual. | |
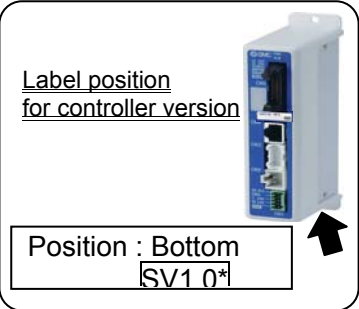
| No. | Phenomenon | Cause | Countermeasure |
|-----|---|---|---|
| 2 | <p>Operation not completed / Operation continue</p> <p>Alarm for "Over motor Vol /code: 1-145" is generated.</p> <p style="text-align: center;">↓</p> <p><Procedure of restart></p> <p>Controller version /SV1.0 or later</p> <p>1. Input the "reset signal." →"SVRE": Automatically ON</p> <p>Controller version /SV0.8* or before</p> <p>1. Input the "reset signal." →"SVRE": Automatically ON</p> <p>2. Input the "setup signal." →Restart operation after the completion of the "return to origin".</p> <div style="border: 1px solid black; padding: 5px; margin: 10px 0;"> <p><u>Label position for controller version</u></p>  <p>Position : Bottom SV1.0*</p> </div> | 1) If the power supply is an "inrush-current restraining type", the alarm may be generated due to voltage drop. | Replace the power supply with a non "inrush-current restraining type" power supply. / Refer to the LEC controller operation manual. |
| | | 2) The Power supply does not have sufficient capacity. | Check the power consumption for each actuator and controller: If necessary replace the existing power supply with a power supply with sufficient capacity. /See 2.1 Specification P.9 to 11 for LEFS /See 2.2 Specification P.12, 13 for LEFB |
| | | 3) Load/resistance more than specified range is being applied to the actuator. | Use within specification range. Check the actuator mounting condition or check if external force adds the resistance of actuator table by using movable cable-duct. /See 2.1 Specifications on p.9 |
| | | 4) The pushing operation is performed at the "Positioning operation position" | Review the content of the step data. |
| | <p>Alarm for "Err overflow/code: 1-196" is generated.</p> <p style="text-align: center;">↓</p> <p><Procedure of restart></p> <p>"Turn the power supply off."</p> <p style="text-align: center;">↓</p> <p>"Turn the power supply on"</p> | 1) Added excessive external force (including vibration) or impact load. | Operate within the specified range. /See 2.1 Specification P.9 to 11 for LEFS /See 2.2 Specification P.12, 13 for LEFB |
| | | 2) The Power supply does not have sufficient capacity. | Check the power consumption for each actuator and controller: If necessary replace the existing power supply with a power supply with sufficient capacity. /See 2.1 Specification P.9 to 11 for LEFS /See 2.2 Specification P.12, 13 for LEFB |
| | | 3) Load/resistance more than specified range is being applied to the actuator. | Use within specification range. Check the actuator mounting condition or check if external force adds the resistance of actuator table by using movable cable-duct. /See 2.1 Specification P.9 to 11 for LEFS /See 2.2 Specification P.12, 13 for LEFB |
| | | 4) The pushing operation is performed at the "Positioning operation position" | Review the content of the step data. |

| No. | Phenomenon | Cause | Countermeasure |
|-----|--|---|---|
| | | 5) The cable is not connected or has been disconnected. | Confirm that the cable is connected correctly. /See 4. Wiring of cable on p.30 |
| | | 6) It was not the intended origin position because the actuator pinched the work-piece during the "return to origin". | Remove the work-piece and restart the return to the intended origin position. |
| | | 7) Wrong input [0] is input as the positioning force. | Check the step data. <Moving force> /See 3.3. Step data setting method on p.21 |
| | | 8) The step data position is not changed correctly after the return to origin direction is changed. | Check the step data. <Position> /See 3.3. Step data setting method on p.21 |
| | | 9) Because the operation of the step data is set to [INC/relative], the table comes into contact with an external object and does not move due to continuous operation. | Check the step data. <Position> /See 3.3. Step data setting method on p.21 |
| 2 | <p>Operation not completed / During operation (Not always, but may happen occasionally)</p> <p>Alarm for "Step data ALM2/code: 1-051" is generated.</p> <p style="text-align: center;">↓</p> <p><Procedure of restart> Input the "reset" signal.</p> | <p>1) Command invalid (unregistered) step data.</p> <p>2) Different input signal to the expected step number is inputted to the controller, because of a too short an interval between the input signal of "IN*" and the "Drive" or inputting the signals at the same time.</p> <p>3) Different input signal to the expected step number is inputted to the controller, because the input signal time was too short.</p> <p>4) Different input signal to the expected step number is inputted to the controller, caused by PLC or other device.</p> | <p>Check if the step data is valid (registered).</p> <p>Add an interval of 15ms (the recommendation is 30ms) or more between the input signals. / See "Operating procedure input/output signals for each operation type" on P.25</p> <p>Add an interval of 15ms (the recommendation is 30ms) or more between the input signals. / See "Operating procedure input/output signals for each operation type" on P.25</p> <p>Check that the step number is inputted correctly for the required motion.</p> |
| | <p>- Operation completed by unexpected motion.</p> <p>- No alarm / During operation (Not always, but may happen occasionally)</p> | <p>1) Different input signal to the expected step number is inputted to the controller, because of a too short an interval between the input signal of the "IN*" and the "Drive" or inputting the signals at the same time.</p> <p>2) Different input signal to the expected step number is inputted to the controller, because the input signal time was too short.</p> | <p>Add an interval of 15ms (the recommendation is 30ms) or more between the input signals. / See "Operating procedure input/output signals for each operation type" on P.25</p> <p>Note) Recommend to check the "OUT" output signal for more secure operation.</p> <p>Add an interval of 15ms (the recommendation is 30ms) or more between the input signals. / See "Operating procedure input/output signals for each operation type" on P.25</p> <p>Note) Recommend to check the "OUT" output signal for more secure operation.</p> |

| No. | Phenomenon | Cause | Countermeasure |
|-----|--|---|--|
| | | 3) Different input signal to the expected step number is inputted to the controller, caused by PLC or other device. | Check that the step number is inputted correctly for the required motion. / See "Operating procedure input and output signals for each operation type" on P.25 Note) Recommend to check the "OUT" output signal for more secure operation. |
| 3 | "INP" output signal is unstable. "INP" output signal is unstable even after the positioning operation is completed. | 1) The value of [In position] in step data is too small. | Increase [In position] value as the following. LEFS: [0.5] or more LEFB: [1] or more |
| 4 | Positioning repeatability is out of specified range. | 1) It shifts to the next operation by receiving the "INP" output signal. | Shift to the next operation after receiving the "BUSY" output signal is outputted. |
| | | 2) The belt is loosened. | Readjust belt tension to the appropriated value. |
| 5 | Damage | 1) Abnormal external force | Interference of mechanism, eccentric load or excess load leads to cause deformation or damage of the actuator. Eliminate these factors. |
| 6 | The table of the actuator with vertical mounting vibrates repeated up and down. | 1) Actuator carries excess load. | Check if the workload is within the specification range. |
| 7 | The belt driven actuator, vibration / noise occur during operation at speeds within the actuator specification. | 1) Influence of character frequency | Change the speed setting to a speed that does not cause vibration. |
| | | 2) The gain tuning is not suitable. | It may need gain tuning suitable for the application. Contact SMC in this case. |
| 8 | Cannot be actuated manually or by manual override adjustment screw (does not operate). (At stop(EMG) or SVRE[OFF]) | 1) Contacts the stroke end of the actuator or the workpiece. | Check the stroke position and how workpieces are mounted. |
| | | 2) [Lock type] is selected | Supply 24VDC power supply to the [BK RLS] terminal of controller/CN1 power supply plug in order to unlock. /see 5.6 Precautions for the actuator with lock  Warning(7) on P34 |
| | Lock type is selected, but workpieces are dropped during stopping(EMG) or SVRE[OFF], or moved by external force. | 1) Load exceeding the maximum work load is mounted, or external force more than the lock holding force is applied. 2) 24VDC is supplied to "BK RLS" terminal of controller/CN1 power supply connector. | Check the mounted load and lock holding force to confirm if they are within the operation range. /See 2.1 Specification P9 to 11 for LEFS /See 2.2 Specification P.12, 13 for LEFB Stop supplying 24VDC power supply to the [BK RLS] terminal /see 5.6 Precautions for the actuator with lock  Warning(8) on p34 |

Revision history

No.LEF-OM00201

Jun / 2009 1st printing

No.LEF-OM00202

Apr / 2010 Revision

No.LEF-OM00206

Dec / 2010 Revision

•Addition / LEFS40

No.LEF-OM00207

Mar / 2011 Revision

•Addition / LECP1

SMC Corporation

4-14-1, Sotokanda, Chiyoda-ku, Tokyo 101-0021 JAPAN

Tel: + 81 3 5207 8249 Fax: +81 3 5298 5362

URL <http://www.smcworld.com>

Note: Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

© 2010 SMC Corporation All Rights Reserved

